

Corkcomfort

Amazing Designs with the comfort of cork



Cork is a natural material that comes from the bark of the cork oak tree, with unique and incomparable qualities that no ingenious human has yet managed to copy or improve. Its cell structure resembles a honeycomb, enabling it to act as a natural thermal and sound insulator and also providing shock absorbing properties.

These exclusive qualities of cork make it ideal to use in flooring, as it grants an exceptional comfort while also being a renewable and sustainable resource.



Over the years, Wicanders has developed floor and wall coverings with exclusive properties due to its innovative Corktech technology.

By using a unique engineered multilayer structure, which combines state of the art technology with the exclusive natural properties of cork, a higher standard in flooring was achieved, providing the perfect match between beauty, comfort and durability.

The uniqueness of **Cork**comfort floors was achieved by integrating three cork layers with different purposes. The decorative visual is accomplished by combining various shapes of natural cork, in order to produce thin sheets of veneer full of authenticity and personality. A second, thicker layer of cork provides superior comfort, noise reduction and warmth. The integrated cork underlay reinforces thermal and acoustic properties, resulting in a silent environment and important energy cost savings.




Genuine cork veneer

Protective wear layer

Agglomerated cork Step sound reduction, warmth & comfort

High density fiberboard

Insulating cork underlay Impact sound reduction & thermal reinforcemen

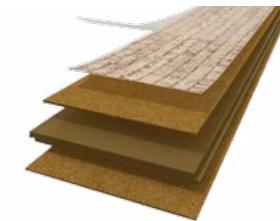

MORE THAN JUST A BEAUTIFUL FLOOR



+ SILENCE

Cork's natural properties make it an excellent sound absorber. **Cork**comfort floors reduce noise transmission between and within rooms, creating a quieter and peaceful environment.



+ NATURAL THERMAL INSULATION

The unique thermal insulation features of cork provide an optimal floor temperature all year round, assuring a more warm and comfortable ambiance with energy cost savings.





+BODY WELLNESS

Softer than wood and harder than carpets, the perfect mix to absorb heel strike impacts, relieving leg and back stress, but stable enough to help the foot impulse and decrease the walking fatigue.



Corkcomfort floors have the ability to bounce back from hard impacts, which makes them very robust and increases the life span of the flooring.

+WALKING COMFORT

Corkcomfort floors are very comfortable to walk on due to cork's natural and inherent flexibility providing a unique comfort in movement. Even when walking barefoot, a sense of cosiness is felt.

+ IMPACT RESISTANCE

Warm & Comfortable

Feel a warm and pleasant touch under your barefoot

Sustainable & Conscious

The true sustainable flooring

Stylish & Cosy

A cosy living with the freshness of a modern decor



Amazing Designs with the comfort of cork

The distinctive style of cork flooring

In modern interior design, the creation of spaces with style and personality starts with beautiful and expressive floors. Using and combining different shapes of natural Cork, our team of experts and trendsetters created a unique collection that opens a new approach in decoration, in harmony with nature and human emotions.

authenticity and character.

Floating solution

With the glueless Corkloc® installation system, simply put the planks together and securely click them into place. It is a very quick, safe and clean solution. Available with three different protective finishings: WPS and WRT for residential areas and HPS for commercial areas.

The floating solution is available in tiles of 605x445mm (23 13/16 x 17 ½") or boards of 905x295mm (35 5/8x11 5/8") and in planks of 1220x140mm (48x5 1/2") and 1230x145mm (48 3/8x5 5/8").

Protective wear layer (WPS, WRT or HPS) Easy maintenance & extra resista

Genuine cork veneer Decorative visua

Agglomerated cork Step sound reduction, warmth & comfort

HDF - High Density Fiberboard with Corkloc Ouick & easy installation

Integrated cork underlay Impact sound reduction & thermal reinforcement

Glue down solution

The traditional glue down solution provides superior comfort and minimal step sound. Available in 4 different protective finishings: PU Pre-Finished and Sanded (finish on--site); PU Finished; WRT for residential areas.


Available in the tile format of 600x300mm (23 5/8x11 13/16"), 450x450mm (17 11/16x17 11/16"), 600x450mm (23 5/8x17 11/16") and in planks of 900x150mm (35 7/16x5 7/8") or 600x150mm (23 5/8x5 7/8") and in the board format of 900x300mm (35 7/16x11 13/16").


Protective wear layer (PU Pre-Finished, PU Finished ou WRT)..... Easy maintenance & extra resistance

Genuine cork veneer Decorative visual

Agglomerated cork ... ep sound reduction, warmth & comfort

The style, charm and sophistication of these genuine natural designs, creates atmospheres full of

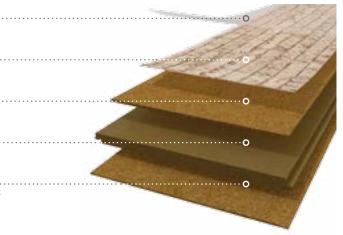

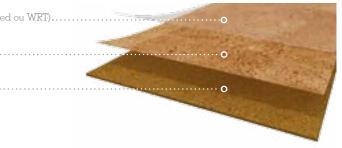

Fashionable

Modern Chic

Fashionable range has a reinvented cork pattern veneer which confers a distinctive sophistication into modern decoration.

Available in a five color range, from light to dark hues, it offers the perfect balance between chic colors and timeless decoration.





Fashionable Glacier
 C85J001 - 905 x 295 x 10,5mm
 | Floating WRT

 C15J001 - 905 x 295 x 10,5mm
 | Floating HPS | 4 micro beveled

 C95J001 - 900 x 300 x 4mm
 | Glue down PU Finished



Fashionable Cement C85L001 - 905 x 295 x 10,5mm | Floating WRT

 C15L001 - 905 x 295 x 10,5mm
 | Floating HPS | 4 micro beveled

 C95L001 - 900 x 300 x 4mm
 | Glue down PU Finished



Fashionable Grafite
 Fashionable Grame
 Floating WRT

 C85M001 - 905 x 295 x 10,5mm
 | Floating WRT

 C15M001 - 905 x 295 x 10,5mm
 | Floating HPS | 4 micro beveled

 C95M001 - 900 x 300 x 4mm
 | Glue down PU Finished





Fashionable Macchiato C85N001 - 905 x 295 x 10,5mm | **Floating** WRT C15N001 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled C95N001 - 900 x 300 x 4mm | Glue down PU Finished



Fashionable Mystic C85K001 - 905 x 295 x 10,5mm | Floating WRT C95K001 - 900 x 300 x 4mm Glue down PU Finished



C15K001 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled

Tweedy Saw Cut


Cottage Style

The Saw Cut look follows the latest trends in cottage style filling every space with a communion of craftsmanship and design.





Tweedy Saw Cut Moon C86D001 - 905 x 295 x 10,5mm | **Floating** WRT



Tweedy Saw Cut Suede C86B001 - 905 x 295 x 10,5mm | **Floating** WRT

Tweedy Wood

Chalet Comfort

Tender elegance in wood looks improve a relaxed space in harmony with raw nature and its soul.



Tweedy Wood Timide C86H001 - 905 x 295 x 10,5mm | **Floating** WRT



Tweedy Wood Cocoa C86F001 - 905 x 295 x 10,5mm | **Floating** WRT







Tweedy Wood Coffee C86I001 - 905 x 295 x 10,5mm | **Floating** WRT

Linea

Linea's decor and hues meet modern relaxed interiors.

A natural style for restful atmospheres full of authenticity.


All available with the new WPS protective finishing.



Linea Chestnut



Linea Champagne C85H001 - 905 x 295 x 10,5mm | Floating WPS

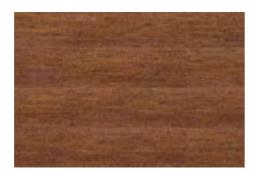

Linea Chestnut C85I001 - 905 x 295 x 10,5mm | Floating WPS

Skin

Exotic Style

Following the latest trends, these four elegant visuals convey a sense of modernity allied to Nature's pure textures.

With a surface similar to a refined natural leather, the magnificent Skin visuals, add an exotic pinch to every room and, at the same time, merge with the surrounding decoration.



Skin Dark C95B001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled



Skin Champagne C95W001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled



Skin Natural C95V001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled





Skin Timide C95C001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled

Crackle


Earth´s Design

Crackle visuals bring nature indoors through a pattern carved from the depth of a canyon landscape.

Four unique hues from geologic colors were achieved to communicate Earth's essence to every space.

An alluring natural look to decorate delightful atmospheres.



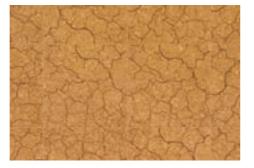


Crackle Natural C95D001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled



C94Y001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled



Crackle Dark C95A001 - 450 x 450 x 6mm | Glue down PU Finished | 4 beveled

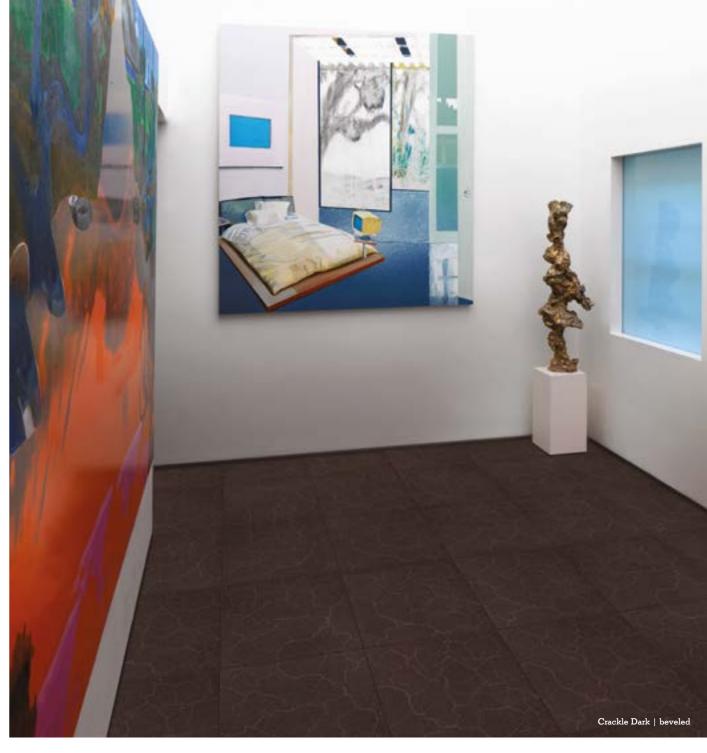


Double Side


Cork for Life

Interior decoration is now fulfilled with these wonderful two-in-one articles that increase the value of a traditional visual.

Double side visuals have the potential to boost new and daring combinations that can result in unique patterns perfect to embellish original spaces.




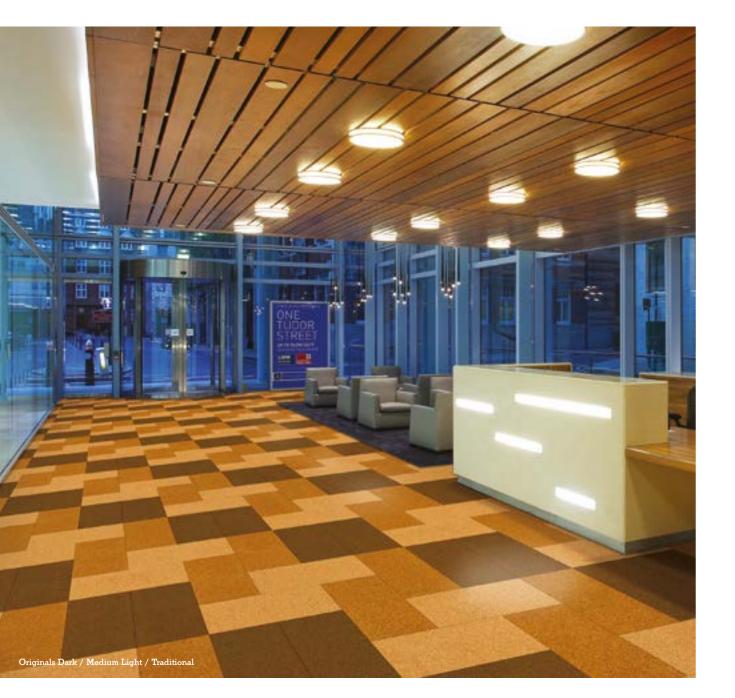

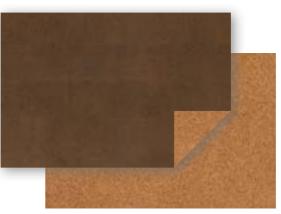

Originals Dark / Traditional C90A001 - 600 x 300 x 6mm | Glue down Double side Sanded



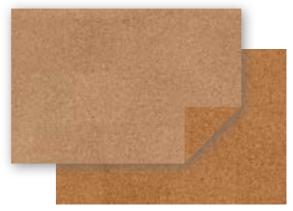

Originals Medium Light / Traditional C90B001 - 600 x 300 x 6mm | Glue down Double side Sanded

Personality

Cosy and relaxed

The harmonious burl pattern is the essence of the Personality visuals, appealing to extremely cosy and comfortable interiors.

The soothing **light colors** grant soft and subtle feelings and the slightly transparent **brown** shades interiors get more expressive but yet maintaining the same cosy feeling.



Personality Moonlight P801002 - 905 x 295 x 10,5mm | Floating WRT

P901003 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled






Personality Timide

 P802002 - 905 x 295 x 10,5mm
 | Floating WRT

 P902003 - 600 x 300 x 6mm
 | Glue down PU Pre-Finished | 4 beveled



Personality Champagne P805002 - 905 x 295 x 10,5mm | **Floating** WRT P905003 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled

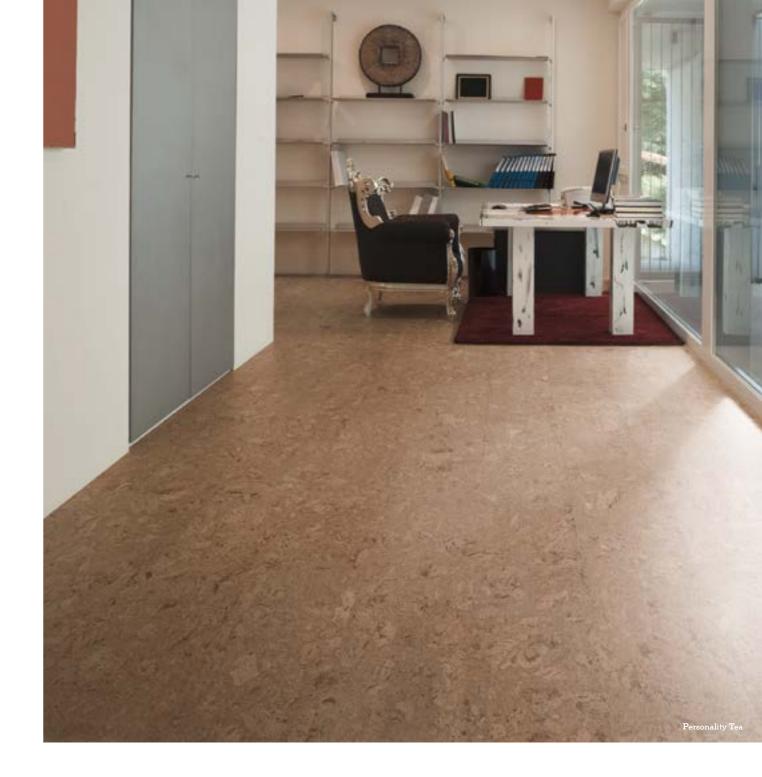



Personality Eden P806002 - 905 x 295 x 10,5mm | **Floating** WRT P906003 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled



P808002 - 905 x 295 x 10,5mm | **Floating** WRT





Personality Tea P810002 - 905 x 295 x 10,5mm | Floating WRT P910003 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled



Personality Chestnut P832002 - 905 x 295 x 10,5mm | Floating WRT

Identity

Cosy sophistication

With the look of a refined wood strip, Identity will give a touch of formal sophistication to any interior decoration. It is available in a wide range of natural colors that perfectly fit in with most decor styles.

The **light shades** are ideal to create casual and peaceful atmospheres.



Identity Moonlight I801002 - 905 x 295 x 10,5mm | Floating WRT

C12N002 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled C92N001 - 600 x 450 x 4mm | Glue down PU Finished | 4 beveled I901002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled





I802002 - 905 x 295 x 10,5mm | Floating WRT C12M001 - 905 x 295 x 10,5mm | **Floating** HPS | 4 micro beveled C92M001 - 600 x 450 x 4mm | Glue down PU Finished | 4 beveled 1902002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled



Identity Champagne I805002 - 905 x 295 x 10,5mm | Floating WRT C12O001 - 905 x 295 x 10,5mm | **Floating** HPS | 4 micro beveled C92O001-600 x 450 x 4mm 1905002 - 600 x 300 x 6mm

| Glue down PU Finished | 4 beveled | Glue down PU Pre-Finished | 4 beveled





Identity Silver 1803002 - 905 x 295 x 10,5mm | Floating WRT C12Y002 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled I903002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled



Identity Tea I810002 - 905 x 295 x 10,5mm | **Floating** WRT

C12R001 - 905 x 295 x 10,5mm | **Floating** HPS | 4 micro beveled I910002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled C92R001 - 600 x 450 x 4mm | Glue down PU Finished | 4 beveled

With the appealing **earthy tones**, Identity visuals get dressed with a sophisticated touch which will enrich interior atmospheres.



Identity Spice I808002 - 905 x 295 x 10,5mm | **Floating** WRT

C12S001 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled 1908002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled



Identity Eden I806002 - 905 x 295 x 10,5mm | **Floating** WRT C12P001 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled I906002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled





Identity Chestnut I832002 - 905 x 295 x 10,5mm | Floating WRT C13G001 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled C93G001 - 600 x 450 x 4mm | Glue down PU Finished | 4 beveled 1932002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled




Identity Nightshade I821002 - 905 x 295 x 10,5mm | Floating WRT C12L001-905 x 295 x 10,5mm | **Floating** HPS | 4 micro beveled C92L001 - 600 x 450 x 4mm | Glue down PU Finished | 4 beveled 1921002 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled

Nuances

Spaces of glamour

Nuances has sprinkles of dark cork granules that create a very charming and refined look. Inviting brown tones that match perfectly this striking pattern will turn your space into a statement of elegance and glamour.

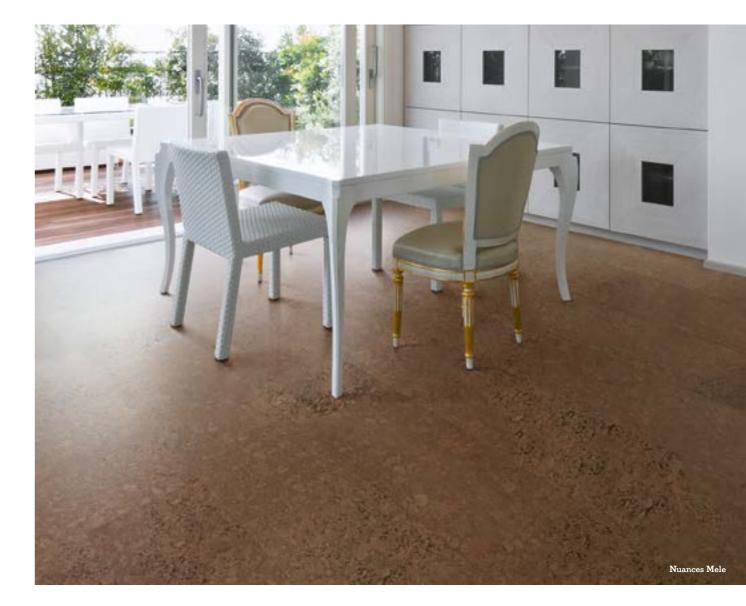



N813001 - 905 x 295 x 10,5mm | **Floating** WRT



Nuances Castagna N814001 - 905 x 295 x 10,5mm | **Floating** WRT

Slice

The charming creativity

Handmade cork floors have a particular expressive appearance due to the unique interaction of various cork elements. Slice is the right choice to revive any ambiance and give it a comfortable and contemporary style.





Slice Marble C84E001 - 905 x 295 x 10,5mm | **Floating** WRT



Slice Tea C84F001 - 905 x 295 x 10,5mm | **Floating** WRT

Slate

Organic Stone Visual

Unique effects and nuances suggest the return to nature through spaces steeped in organic sensations.

The slate visual recreates the stone surface texture with a majestic cork veneer. The perfect tile format of 605x445mm reinforces this effect. Your eye perceives a stone tile but your feet feels the comfortable warmth and pleasant touch of cork.



Slate Tawny C81E001 - 605 x 445 x 10,5mm | **Floating** WRT



Slate Moccaccino C81C001 - 605 x 445 x 10,5mm | Floating WRT



Slate Caffe C81A001 - 605 x 445 x 10,5mm | **Floating** WRT





Slate Arctic C81D001 - 605 x 445 x 10,5mm | **Floating** WRT



Slate Algae C81F001 - 605 x 445 x 10,5mm | **Floating** WRT

Linn

Vivid Design

Modern designs have an independent and expressive character. The trendy patterns of Linn visuals have unrepeatable shades enlivened by light and dark tones, which gives identity and personality to interior modern decors.





Linn Moon C81N001 - 605 x 445 x 10,5mm | **Floating** WRT



Linn Blush C81O001 - 605 x 445 x 10,5mm | **Floating** WRT



Linn Cioccolato C81L001 - 605 x 445 x 10,5mm | **Floating** WRT

Lane

Cosmopolitan Style

The Lane visual has a quite refreshing look that will add an air of classy sophistication to any room. This interesting design is unique and traditional, maintaining a natural touch but full of modernity.

The innovative plank dimension of 1220x140mm conveys depth and elegance.





Lane Timide C83R001 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled C13R001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled



Lane Chestnut C83S001 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C13S001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled

Traces

Modern Rustic

The Modern Rustic decor is a blend of modern shapes with a casually elegant style that creates a warm and welcoming interior.

Traces visual is aligned with this new tendency and gives a taste of life in closer proximity to nature.





Traces Moonlight

C95P002 - 900 x 150 x 4mm | Glue down PU Finished | 2 beveled C95P001 - 600 x 150 x 4mm | Glue down PU Finished | 4 beveled



Traces Champagne

C95O002 - 900 x 150 x 4mm | Glue down PU Finished | 2 beveled C95O001 - 600 x 150 x 4mm | Glue down PU Finished | 4 beveled



C95R002 - 900 x 150 x 4mm | Glue down PU Finished | 2 beveled C95R001 - 600 x 150 x 4mm | Glue down PU Finished | 4 beveled



Traces Tea Q810001 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled C14M001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled



Traces Spice



Q808003 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C14N001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled

Reed

Linear expression

The stripe linear look of Reed visual is perfect to give a natural exotic touch to modern interiors. The optical perspective of continuity is ideal to unify and lengthen spaces.

The narrow plank dimension of 1220x140mm reinforces the optical effect and its elegance.





Reed Meridian

C83T001 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C13T001* - 1220 x 140 x 10,5mm | **Floating** HPS | 4 micro beveled



Reed Barley

C83U001 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C13U001* - 1220 x 140 x 10,5mm | **Floating** HPS | 4 micro beveled

President

Handmade art

President is an exclusive handmade cork veneer with a high level of skilled craft work. Only veneer pieces of the finest quality are used for this exclusive pattern. This prevailing dark tone collection will style your space with an elegant character.

The innovative plank dimension of 1220x140mm conveys depth and reinforces its elegance.





President Spice

F808002 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled C14K001 - 1220 x 140 x 10,5mm | **Floating** HPS | 4 micro beveled



President Chestnut

F832003 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C14L001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled



President Nightshade

F821003 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C14J001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled



President Chocolate F831002 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled C14I001 - 1220 x 140 x 10,5mm | **Floating** HPS | 4 micro beveled

Flock

Cosy and elegant

This graceful visual with big random virgin cork portions will create an elegant and delightful ambiance. It is available in a wide range of natural colors to perfectly fit in with most decors.

The innovative plank dimension of 1220x140mm conveys depth and reinforces its elegance.





Flock Tea

C83Z001 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C13Z001 - 1220 x 140 x 10,5mm | **Floating** HPS | 4 micro beveled



Flock Chestnut C84A001 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled C14A001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled



Flock Chocolate

C83Y001 - 1220 x 140 x 10,5mm | **Floating** WRT | 4 beveled C13Y001* - 1220 x 140 x 10,5mm | **Floating** HPS | 4 micro beveled



Flock Auburn C83X001 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled



Flock Moonlight C81X001 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled C11X001 - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled





 Flock Champagne

 C81Y001 - 1220 x 140 x 10,5mm | Floating WRT | 4 beveled

 C11Y001* - 1220 x 140 x 10,5mm | Floating HPS | 4 micro beveled

Originals

Cork Lovers

There is nothing more original than Nature. Its fascinating surfaces appeal to our senses and will smooth any ambiance. From nature patterns with small cork granules to expressive shapes tailored using big burls of cork, Originals offers a wide variety of looks to bring nature indoors.



Originals Country
 O832004 - 905 x 295 x 10,5mm
 Floating WRT

 DN02006* - 600 x 300 x 6mm
 | Glue down PU Pre-Finished | 4 beveled





Originals Rhapsody O825005 - 905 x 295 x 10,5mm | Floating WRT C125001 - 905 x 295 x 10,5mm | Floating HPS | 4 micro beveled DN12003* - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled RN12002 - 600 x 300 x 4mm | Glue down Sanded





Originals Shell O824003 - 905 x 295 x 10,5mm | **Floating** WRT RN14002 - 600 x 300 x 4mm | Glue down Sanded

DN10001 - 600 x 300 x 6mm | Glue down PU Pre-Finished RV14004 - 600 x 300 x 4mm | Glue down WRT



Originals Traditional_Natural O801007 - 905 x 295 x 10,5mm | **Floating** WRT C111001 - 905 x 295 x 10,5mm | **Floating** HPS | 4 micro beveled C811001 - 905 x 295 x 10,5mm | **Floating** WPS DN01005 - 600 x 300 x 6mm | Glue down PU Pre-Finished DN01006* - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled RV10003 - 600 x 300 x 4mm | **Glue down** WRT RN01008 - 600 x 300 x 4mm | Glue down Sanded



 C141001 - 905 x 295 x 10,5mm
 Floating HPS | 4 micro beveled

 DN17002 - 600 x 300 x 6mm
 | Glue down PU Pre-Finished
 DN17003 - 600 x 300 x 6mm | Glue down PU Pre-Finished | 4 beveled RN17001 - 600 x 300 x 4mm | Glue down Sanded



Originals Harmony O821005 - 905 x 295 x 10,5mm | Floating WRT
 Clipping
 Stating
 WR1

 Clipping
 905 x 295 x 10,5mm
 Floating HPS | 4 micro beveled

 DN11003 - 600 x 300 x 6mm
 Glue down PU Pre-Finished

 DN11004 - 600 x 300 x 6mm
 Glue down PU Pre-Finished | 4 beveled
 RN11002 - 600 x 300 x 4mm | Glue down Sanded RV11007 - 600 x 300 x 4mm | Glue down WRT





RN13001* - 600 x 300 x 4mm | Glue down Sanded RV13006 - 600 x 300 x 4mm | **Glue down** WRT

 OR
 Security

 O849003 - 905 x 295 x 10,5mm
 | Floating WRT

 DN13001 - 600 x 300 x 6mm
 | Glue down PU Pre-Finished

 DN13003 - 600 x 300 x 6mm
 | Glue down PU Pre-Finished



Originals Character O822002 - 905 x 295 x 10,5mm | **Floating** WRT
 OD22001* - 600 x 300 x 6mm
 I Glue down PU Pre-Finished | 4 beveled

 RN16001 - 600 x 300 x 4mm
 Glue down Sanded

 RV16004 - 600 x 300 x 4mm
 Glue down WRT





Originals Symphony

O830003 - 905 x 295 x 10,5mm
DN20001 - 600 x 300 x 6mm
DN20003 - 600 x 300 x 6mm
RN20001 - 600 x 300 x 4mm

- Floating WRT
- Glue down PU Pre-Finished
- Glue down PU Pre-Finished | 4 beveled
- Glue down Sanded

Get the best results with Wicanders' accessories!

Underlays

Increased comfort and insulation

To reinforce the already amazing insulation properties of cork flooring, Wicanders provides Acousticork, a cork underlay which lets you turn your home into an even cosier space.

Acousticork increases the walking comfort, and also reduces the noise and the heat dispersion. Overall, it makes rooms cosier and more peaceful, which are essential in making any house feel homey.

It is available in two options: agglomerated cork and agglomerated cork with a moisture barrier.



Skirtings

The perfect match to make a pleasant interior

In order to help to create a more classy and harmonious interior, Wicanders provides skirting profiles to complement your floor. Create your ideal transition between the walls and the floor, whether by an exact match or contrasting colors.

There are skirting profiles available for the complete range of Corkcomfort products.

Contact your supplier for information on the available skirting references.



To keep your floor spotless, Wicanders has available a set of auxiliary products. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible.

Wicanders Soft Cleaner

This mild detergent is appropriate for weekly or even daily cleaning.It can be used to remove dirt, stoping it from infiltrating in the joints and in the embossing of the product.

REGULAR MAINTENANCE

PERIODIC

MAINTENANCE



Wicanders Power Polish

This product is used for periodic maintenance, giving added protection to the floor due to its strong cleaning power. It helps to keep the floor's appearance intact over the years and is especially important to use in high traffic areas.



Maintenance

Optimal care for an everlasting beauty



Wicanders Spray Cleaner

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.



Wicanders Power Strip

The Power Strip is used to clean persistent dirt and to remove old maintenance products, since the accumulation of too many coats of these products can make the floor have an unpleasant look.




Why is Wicanders cork flooring the perfect choice?




Thanks to the acoustic insulation provided by cork. Wicanders floors can easily cut noise within and between rooms.

Comparing the walking sound between cork and laminate floors, tests confirm that cork floors have an exceptional result reducing the sound up to 53%. Study run by Entwicklungsund Prüflabor Holztechnologie gmbH (EPH) in Germany according to IHD-W 431



NATURAL THERMAL INSULATION

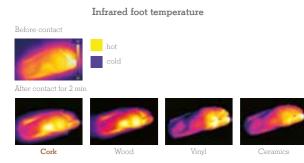

The natural thermal properties of cork make Wicanders floors very energy efficient, providing an optimal temperature all year round.

When testing foot temperature in contact with four different materials, cork floors stand out as being the best solution to retain heat.

Better than wood and by far better than vinyl or ceramic when it comes to avoid energy dispersion. Study run by IBV biomechanical institute in Valencia, Spain.


+WALKING COMFORT

Cork floors are very comfortable to walk on, due to cork's natural and inherent flexibility, providing a unique comfort in movement.

When testing the level of comfort perception of people walking for 45 minutes over five different materials, results show that Wicanders cork floors have a great outcome.

With high comfort perception, it outperforms linoleum, laminate and ceramic floors.

Study run by IBV biomechanical institute in Valencia, Spain.




+BODY WELLNESS

Wicanders floors are stable enough to avoid the leg and back stress that is generated by walking on too hard or too soft floors.

Softer than laminate and harder than carpets, Wicanders cork floors are the perfect mix to reduce heel strike impacts and related body tensions, but stable enough to help the foot impulse and provide the needed stability to reduce effort on walking and decrease body fatique.

Study run by IBV biomechanical institute in Valencia, Spain.

IMPACT RESISTANCE





Fast & Easy Installation

Floating floors are easy and fast to install. And in glue down floors there is no need to have a special subfloor preparation and only require the use of a unilateral glue, so they save time and reduce installation expenses.




Low & Easy Maintenance

The special surface finishing of **Cork**comfort floors make them easier to clean and maintain.







- Due to cork's resilience and elasticity, Wicanders floors have the ability to bounce back from hard impacts.
- Tests show that Wicanders cork floors have the highest shock absorbing performance.
- When an object accidentally falls in a cork or in a laminate floor, different results come through.
- Study run by IBV biomechanical institute in Valencia, Spain.



Cork comes from the bark of the cork oak tree. It is removed from the trunk by hand without ever damaging the tree. Every year a new bark grows making it a renewable and sustainable resource.



Think green **choose** Wicanders

Wicanders[®] is a truly sustainable brand! Produced by Amorim, it represents a unique balance between the creation of wealth and the protection of the environment. The starting point is a raw material that is extracted cyclically from the cork oak trees without ever damaging them. This raw material is then transformed into high value-added products while promoting the economic and social sustainability of areas at risk of desertification.

Several eco-efficiency studies, based on a comparative analysis with several other types of flooring, illustrate the excellent environmental performance of Wicanders[®] products and its manufacturing process. Besides the smaller amounts of energy and raw materials required for the manufacturing process, these products actively contribute to reducing global warming, not only through their low emissions, but also due to cork's natural property of retaining CO_2 .



It is estimated that the Portuguese cork oak forest – montado – is responsible for retaining 5% of the country's annual $\rm CO_2$ emission, representing 4.8 million tons per year.



Inspire **purity**

Having in mind health and environment concerns, Wicanders has developed a Phthalate Free solution for the HPS finishing. Phthalates are substances usually included in plasticizers, which with time can become harmful. By replacing them in the HPS finishing, Wicanders presents a greener and healthier solution that grants improved indoor air quality, while also maintaining the flexibility, transparency and durability of a high performance finish.



(except for gluedown Sanded which achieved

It certainclaim heips fifcation of interior and materials that chemical emissions, produc the quality of the hich the products obtain It promotes global firom A bit, the products d safety.



Global GreenTagCertTM is an independent certification and rating scheme for green products, recognized by the Green Building Councils of Australia and New Zealand This certification also allows the products to be listed in the Ecospecifier Global concerdents.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard 1500 1005



Cork Eco Mark is a Japan Er the Association prog promotes environmen of lifestyles through wis and choices. This cere product category to consideration the en life taxo.

The importance of Cork Oak

The Cork Oak (Quercus Suber L.) is a tree belonging to the Oak family from which Cork is extracted. Its value is based not only on the products extracted from the tree, but on all of the agricultural, forest, pastoral and hunting activities that revolve around the cultivation of the Cork Oak.

Regular extraction of the Cork (a process called stripping) is a fundamental contribution for environmental, economic and social sustainability in the rural areas of the Mediterranean region where the Cork Oak may be found.

The Cork tree is a slow growing tree, which may live for 200 years, which allows it, on average, to be stripped 16 times during its lifetime. The first extraction of cork from the Cork Oak tree occurs only 25 years after planting, following which it is harvested in 9 year cycles, without ever damaging the tree in any way. This method allows the cork oak forest to fulfill its role of fixing $CO_{2'}$ thus actively contributing to reduce global warming.

The Cork forest in Portugal (700.000 hectares), known as "Montado", is a typical Iberian Landscape which is key in supporting a natural bio-diversity, including some of the most endangered species in the world: Iberian Lynxes, Imperial Eagles', Black Storks, Wolves and Wild Bears.





Wicanders' solutions for a perfect floor!

Try our easy floors and enjoy your home!



INSTALLATION SYSTEMS



FINISHINGS

HPS surface finish (High Performance Surface) has been specially developed for areas with heavy traffic, such as commercial, business or general public areas. This high performance surface has an extra hard wearing surface combined with Nano-Beads Technology, where extremely tiny beads are embedded in a top layer for improved properties such as scratch, slip, scuff and stain resistance.

Xtreme WRT surface finish (Wear Resistance Technology) is the right choice to fit the most demanding needs of domestic areas. This environmental friendly varnish is based on a ceramic compound which ensures exceptional strength and longevity.

WPS protective finishing (Wear Protect Surface) was developed with an excellent resistance for the most demanding domestic areas. This varnish has an improved long life span and a soft touch.

For domestic areas that need a natural look and a soft touch, **PU** is the right solution. It is available as a pre--finished, to be completed on site, and a ready to use solution (PU Finished).

For those seeking for a customized solution, the **Sanded** option is what you are looking for. The surface is prepared to be finished on site, so you can select the finish that best suits your needs.















CORK LOC[®] 2G

Välinge's 2G locking system is one of the most used and appreciated systems in the world.

It is a strong and robust mechanical, glue-free, locking system installed by angling of both long and short side.

CORK LOC[®] FOLD DOWN

The Cork Loc Fold Down system, designed to simplify the installation by a "single-action-movement", is fast and easy to install. One single maneuver and the floor board is installed. This innovative system is available for narrow planks in 1220x140mm.

CORK LOC[®] 5G-C


The 5G-C locking technology is the most advanced type of Fold Down system on the market.

It is a single action installation system with angling on the long side and a flexible tongue to fold the short side. The installation with Corkloc 5G-C locking system is faster and easier than conventional locking systems, and it really clicks, giving you a confirming sound. It is available for tiles in 605x445mm.

Technical solutions & warranty

Glue down solution

READY TO USE

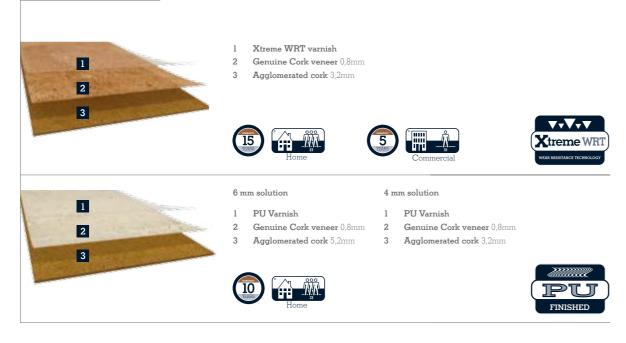

FINISH ON-SITE





- 1 HPS varnish 2 Hard wearing surface 0,5mm
- 3 Genuine cork veneer 0.8mm
- 4 Flexible and insulating cork layer 1,7mm
- 5 HDF high density Fiberboard with CORKLOC[®] 6mm
- 6 Integrated insulating cork underlay 1,5mm





- 1 Xtreme WRT varnish
- 2 Genuine cork veneer 0,8mm
- 3 Flexible and insulating cork layer 2,2mm 4 HDF - high density Fiberboard with CORKLOC 6mm
- 5 Integrated insulating cork underlay 1,5mm





- 1 WPS varnish
- 2 Genuine cork veneer 0,8mm
- 3 Flexible and insulating cork layer 2,2mm
- 4 HDF high density Fiberboard with CORKLOC 6mm
- 5 Integrated insulating cork underlay 1,5mm



(a) Must be varnished on-site with minimum 1-2 coats of W-700 or W-2000 or another recommended varnish • (b) Must be (a) Must be varnished on-site with minimum 1-2 coats of W-2000 or another recommended varnish (b) Must be varnished on-site with minimum 1-2 coats of W-2000 or another recommended varnish for this level of use (see recommendation table in the packaging) • (c) Must be varnished on-site with minimum 3 coats of W-2000 or another recommended varnish (d) Must be varnished on-site with minimum 3 coats of W-2000 or another recommended varnish for this level of use (see recommended varnish to the packaging).

Floating solution

READY TO USE



Product Selector

	WPS		WRT		HPS
Class of use (ISO 10874)	23	31	31	31	33
	905 x 295 x 10,5mm	1220 x 140 x 10,5mm	905 x 295 x 10,5mm	605 x 445 x 10,5mm	905 x 295 x 10,5mm
Dimensions	35 5/8x11 5/8x3/8"	48x5 1/2x3/8"	35 5/8x11 5/8x3/8"	23 13/16x17 ½x3/8"	35 5/8x11 5/8x3/8"
Beveling	No	4 sides	No	No	4 sides micro
Installation system	Cork Loc 2G	Cork Loc Fold Down	Cork Loc 2G	Cork Loc 5G-C	Cork Loc 2G
Commercial Reference					
Tweedy Saw Cut Moon			C86D001		
Tweedy Saw Cut Suede			C86B001		
Iweedy Wood Timide			C86H001		
weedy Wood Coffee			C86I001		
weedy Wood Cocoa			C86F001		
Originals Country			0832004		
Originals Rhapsody			0825005		C125001
Originals Natural	C811001		O801007		C111001
Originals Shell			0824003		
Originals Dawn			O849003		
Originals Accent			O841002		C141001
Originals Character			0822002		
Originals Harmony			O821005		C121001
Originals Symphony			O830003		
Linea Champagne	C85H001				
Linea Chestnut	C85I001				
Personality Moonlight			P801002		
Personality Timide			P802002		
Personality Champagne			P805002		
Personality Eden			P806002		
Personality Spice			P808002		
Personality Tea			P810002		
Personality Chestnut			P832002		
Identity Moonlight			I801002		C12N002
Identity Timide			1802002		C12M001
Identity Champagne			1805002		C120001
Identity Silver			1803002		C128001
Identity Eden			1806002		C12P001
Identity Spice			1808002		C125001
Identity Tea			1810002		C12R001
Identity Chestnut			1810002		C13G001
Identity Vightshade			1832002		C13G001
Nuances Mele			N813001		C12LUU1
Nuances Mele Nuances Castagna			N814001		
Nuances Castagna Slice Marble					
Slice Marble Slice Tea			C84E001 C84F001		

		Corkcomf	ort Floating		
		WRT			HPS
Class of use (ISO 10874)	31	31	31	33	33
D: .	1220 x 140 x 10,5mm	905 x 295 x 10,5mm	605 x 445 x 10,5mm	905 x 295 x 10,5mm	1220 x 140 x 10,5mm
Dimensions	48x5 1/2x3/8"	35 5/8x11 5/8x3/8"	23 13/16x17 ½x3/8"	35 5/8x11 5/8x3/8"	48x5 1/2x3/8"
Beveling	4 sides	No	No	4 sides micro	4 sides micro
Installation system	Cork Loc Fold Down	Cork Loc 2G	Cork Loc 5G-C	Cork Loc 2G	Cork Loc Fold Down
Commercial Reference	1				
Fashionable Glacier		C85J001		C15J001	
Fashionable Cement		C85L001		C15L001	
Fashionable Grafite		C85M001		C15M001	
Fashionable Macchiato		C85N001		C15N001	
Fashionable Mystic		C85K001		C15K001	
Slate Tawny			C81E001		
Slate Moccaccino			C81C001		
Slate Caffe			C81A001		
Slate Algae			C81F001		
Slate Ārctic			C81D001		
Linn Moon			C81N001		
Linn Blush			C81O001		
Linn Cioccolato			C81L001		
Lane Timide	C83R001				C13R001
Lane Chestnut	C83S001				C13S001
Traces Tea	Q810001				C14M001
Traces Spice	Q808003				C14N001
Reed Meridian	C83T001				C13T001*
Reed Barley	C83U001				C13U001*
Flock Moonlight	C81X001				C11X001
Flock Champagne	C81Y001				C11Y001*
Flock Tea	C83Z001				C13Z001
Flock Chestnut	C84A001				C14A001
Flock Chocolate	C83Y001				C13Y001*
Flock Auburn	C83X001				
President Spice	F808002				C14K001
President Chestnut	F832003				C14L001
President Chocolate	F831002				C14I001
President Nightshade	F821003				C14J001

Product Selector

	Cork comfort Gl	ue down		
	WRT		PU Pre-Finished	
Class of use (ISO 10874)	31	23 (a); 31 (b)	23 (c); 31 (d)	23 (c); 31(d)
D	600 x 300 x 4mm	600 x 300 x 4mm	600 x 300 x 4mm	600 x 300 x 6mm
Dimension	23 5/8x11 13/16x3/16"	23 5/8x11 13/16x3/16"	23 5/8x11 13/16x3/16"	23 5/8x11 13/16x1/4"
Beveling	No	No	No	4 sides
Commercial Reference				
Originals Country				DN02006*
Originals Rhapsody		RN12002		DN12003*
Originals Natural	RV10003			
Originals Traditional		RN01008		DN01006*
Originals Shell	RV14004	RN14002		
Originals Dawn	RV13006	RN13001		DN13003
Originals Accent		RN17001		DN17003
Originals Character	RV16004	RN16001		DN22001*
Originals Harmony	RV11007	RN11002		DN11004
Originals Symphony		RN20001		DN20003
Originals Dark / Traditional				
Originals Medium Light / Traditional				
Personality Moonlight				P901003
Personality Timide				P902003
Personality Champagne				P905003
Personality Eden				P906003
Personality Spice				
Personality Tea				P910003
Personality Chestnut				1010000
Identity Moonlight				1901002
Identity Timide				1902002
Identity Champagne				1905002
Identity Silver				1903002
Identity Eden				1906002
Identity Spice				1908002
Identity Tea				
				I910002
Identity Chestnut				1932002
Identity Nightshade				1921002
Fashionable Glacier				
Fashionable Cement				
Fashionable Grafite				
Fashionable Macchiato				
Fashionable Mystic				
Traces Moonlight				
Traces Champagne				
Traces Chestnut				
Skin Dark				
Skin Champagne				
Skin Natural				
Skin Timide				
Crackle Dark				
Crackle Timide				
Crackle Natural				

		Corkcomfort Glue down			
		PU Finished			Double Side Sanded
23	23	23	23	23	23 (a); 31 (b)
450 x 450 x 6mm	600 x 150 x 4mm	600 x 450 x 4mm	900 x 150 x 4mm	900 x 300 x 4mm	600 x 300 x 6mm
17 11/16x17 11/16x¼"	23 5/8x5 7/8x3/16"	23 5/8x17 11/16x3/16"	35 7/16x5 7/8x3/16"	35 7/16x11 13/16x3/16"	23 5/8x11 13/16x1/4"
4 sides	4 sides	4 sides	2 sides	No	No
					~~~~~
					C90A001
					C90B001
		C92N001			
		C92M001			
		C92O001			
		C92R001			
		C93G001			
		C92L001			
				C95J001	
				C95L001	
				C95M001	
				C95N001	
				C95K001	
	C95P001		C95P002		
	C95O001		C95O002		
	C95R001		C95R002		
C95B001					
C95W001					
C95V001					
C95C001 C95A001					
C95A001					
C95D001					
	1	1			

(a) Must be varnished on-site with minimum 3 coats of w-700 or w-2000 or another recommended varnish
 (b) Must be varnished on-site with minimum 3 coats of w-2000 or another recommended varnish for this level of use (see recommendation table in the packaging)
 (c) Must be varnished on-site with minimum 1-2 coats of w-700 or w-2000 or another recommended varnish
 (d) Must be varnished on-site with minimum 1-2 coats of w-2000 or another recommended varnish for this level of use (see recommendation table in the packaging)
 (d) Must be varnished on-site with minimum 1-2 coats of w-2000 or another recommended varnish for this level of use (see recommendation table in the packaging)

#### Technical Data Sheet

		Cor	kcomfort Floating WPS	WRT	HPS
			WFS	WRI	пгъ
			<b>905x295x10,5mm</b>   35 5/8x11 5/8x3/8"	905x295x10,5mm   35 5/8x11 5/8x3/8' 605x445x10,5mm   23 13/16x17 ½x3/8' 1220x140x10,5mm   48x5 1/2x3/8'	905x295x10,5mm   35 5/8x11 5/8x3/ 1220x140x10,5mm   48x5 1/2x3/8'
level of use Domestic	ISO 10874	Class			
Level of use Commercial	ISO 10874	Class	-		
7inish Description			UV Acrylic varnish	UV-cured Acrylic varnish with ceramic beads	UV-cured Acrylic varnish with nano particles
General Properties - EN 14085 + EN 12104 + EN	Standard- Test Method	Unit	Specification		
-			± 0,10% up to	± 0,10% up to	± 0,10% up to
Dimensions:	EN ISO 24346	mm	Width : max. 0,5 mm Length: max. 2,0 mm	± 0,10% up to Width : max. 0,5 mm Length: max. 2,0 mm	Width : max. 0,5 mm Length: max. 2,0 mm
Overall thickness	EN ISO 24346	mm	± 0,25	± 0,25	± 0,25
Squareness	EN ISO 24346	mm	≤ 0,50	≤ 0,50	≤ 0,50
Straightness measured at the surface layer	EN ISO 24346	mm	≤ 0,30	≤ 0,30	≤ 0,30
Squareness and Straightness: ≤ 400mm > 400mm	EN ISO 24346	mm	-	-	-
Wear layer density	EN ISO 23996	Kg/m ³	-		nominal value (1360) ± 50
Thickness of agglomerated composition cork base	EN ISO 24340	mm	-		-
Thickness of polyvinylchloride backing (average)	EN ISO 24340	mm	-	-	-
Thickness of cork floor tile	EN ISO 24346	mm	-	-	-
Flatness of the panel Length: Concave / convex Width: Concave / convex	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15
	EN 14005 (Ann D)				
Openings between panels	EN 14085 (Annex B) EN 14085 (Annex B)		≤ 0,20 ≤ 0,20	≤ 0,20 ≤ 0,20	≤ 0,20 ≤ 0,20
Height difference between panels Dimensional stability (humidity)	EN 669 (Annex C)	mm %	≤ 0,20	≤ 0,20 ≤ 5	≤ 0,20 ≤ 5
Dimensional stability after exposure to heat	EN ISO 23999	%	-	-	-
Curling after exposure to heat	EN ISO 23999 EN ISO 23999	mm			
Moisture content	EN 12105	%		-	
Peel resistance	EN ISO 24345	N/50mm		-	≥ 35
Mass per unit area	ISO 23997	g/m²	nominal value (8000) -10%; +13%	nominal value (8000) -10%; +13%	nominal value (8500) -10%; +13%
Apparent density	EN 672	Kg/m ³	-	-	-
Classification Properties - EN 14085 + EN 12104	+ EN 655				
Nominal thickness for cork surface	EN ISO 24340	mm	≥ 2,5	≥ 3,0	-
Wearing Group	EN 660-2	Fv(mm3)	-	-	Wear group T
Thickness of wear layer (Wear group T)	EN ISO 24340	mm (Nominal value)	-	-	≥ 0,5
Overall thickness	EN ISO 24346	mm	-	-	-
Apparent density Castor chair	EN 672 EN 425	Kg/m³ Visual effect after 25 000 cycles		No disturbance to the surface other than slight change in appearance and no delamination shall occur	- No disturbance to the surface other than slight change in appearance an no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	-	No damage shall be visible after testing with a type 2 foot	No damage shall be visible after testi with a type 2 foot
Residual indentation	EN ISO 24343-1	mm	≤ 0,40	≤ 0,40	≤ 0,25
Safety properties - EN 14041					
Fire resistance	EN 13501-1	Class	E _{fl-s1}	C _{fl-s1}	C _{fl-sl}
Slip Classification	EN 13893	Class	DS	DS	DS
Formaldehyde emission	EN 717-1	Class	El	El	El
Electrical behaviour	EN 1815	KV	Not Antistatic	Not Antistatic	Not Antistatic
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/Kg	PCP Free	PCP Free	PCP Free
Optional properties	ICO 26007/-)	(made (h)		Crade 0// for sectors)	Crade 0
Stains Resistance Thermal resistance	ISO 26987(a) EN 12667	Grade (b) (m²K)/W	- R≤ 0,150	Grade 0 (4 for acetone) R≤ 0,150	Grade 0 R≤ 0,150
Incindi resistance	EN 12007 ISO 140-8	(m²K)/W dB (Δ Lw)	R≤ 0,150 -	R≤ 0,150 16	R≤ 0,150 16
Impact sound reduction				13.2	10
		dB(A)			
Reduction improvement	EPH/IHD Works Standard 431	dB(A) %			
Reduction improvement Difference of Loudness	EPH/IHD Works Standard 431	%	· · · · · · · · · · · · · · · · · · ·	51.6 12±3°	53.3 12±3°
Reduction improvement Difference of Loudness Gloss	EPH/IHD Works Standard			51.6	53.3
Reduction improvement Difference of Loudness Gloss <b>ASTM Standards</b>	EPH/IHD Works Standard 431	%		51.6	53.3
Reduction improvement Difference of Loudness Gloss <b>ASTM Standards</b> IIC Impact insulation class	EPH/IHD Works Standard 431 Glossmeter (60°)	% Degrees Gardner(°G)	· · ·	51.6 12±3°	53.3 12±3°
Reduction improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 / ASTM E989	% Degrees Gardner(°G) IIC (dB)	• •	51.6 12±3° 58	53.3 12±3° 75
Reduction improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor Covering Systems	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 / ASTM E989 ASTM E90 / ASTM E413 ASTM D2859	% Degrees Gardner(°G) IIC (dB) STC (dB)	· · · · · · · · · · · · · · · · · · ·	51.6           12±3°           58           54           met the criteria	53.3 12±3° 75 66 met the criteria
Reduction improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor Covering Systems	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 /ASTM E989 ASTM E90 /ASTM E413	% Degrees Gardner(°G) IIC (dB) STC (dB) DS(4,0min)	· · · · · · · · · · · · · · · · · · ·	51.6           12±3°           58           54           met the criteria           23,7	53.3 12±3° 75 66 met the criteria 208,3
Reduction improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor Covering Systems Optical Density of smoke	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 /ASTM E989 ASTM E90 /ASTM E413 ASTM D2859 ASTM662	% Degrees Gardner(°G) IIC (dB) STC (dB) DS(4,0min) DS(4,0min)	· · · · · · · · · · · · · · · · · · ·	51.6 12±3° 58 54 met the criteria 23,7 32,3	53.3 12±3° 75 66 met the criteria 208,3 163
Reduction improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor Covering Systems Optical Density of smoke Critical radiant flux	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 / ASTM E989 ASTM E90 / ASTM E413 ASTM D2859	% Degrees Gardner(°G) IIC (dB) STC (dB) DS(4,0min)	· · · · · · · · · · · · · · · · · · ·	51.6           12±3°           58           54           met the criteria           23,7	53.3 12±3° 75 66 met the criteria 208,3
Reduction improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor Covering Systems Optical Density of smoke Critical radiant flux Residual indentation	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 /ASTM E989 ASTM E90 /ASTM E413 ASTM D2859 ASTM662 ASTM E648	% Degrees Gardner(°G) IIC (dB) STC (dB) DS(4,0min) DS(4,0min) (W/cm2)	.           .           .           .           .           .           .           .           .           .	51.6 12±3° 58 54 met the criteria 23,7 32,3 0,38	53.3 12±3° 75 66 met the criteria 208,3 163 0,68
Impact sound reduction Reduction Improvement Difference of Loudness Gloss ASTM Standards IIC Impact insulation class STC Classification for Rating Sound Insulation Ignition Characteristics of Finished Textile Floor Covering Systems Optical Density of smoke Critical radiant flux Residual indentation Static load resistance Thermal conductivity	EPH/IHD Works Standard 431 Glossmeter (60°) ASTM E492 /ASTM E989 ASTM E30 /ASTM E413 ASTM D2859 ASTM662 ASTM E648 ASTM F1914	% Degrees Gardner(°G) IIC (dB) STC (dB) DS(4,0min) DS(4,0min) (W/cm2) (%)	.           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .           .	51.6         12±3°         58         54         met the criteria         23,7         32,3         0,38         0,2	53.3 12±3° 75 66 met the criteria 208,3 163 0,68 0,2

		ıfort Glue down	
	PU Pre-Finished	PU Finished	Sanded
600x300x4mm	600x300x4mm   23 5/8x11 13/16x3/16"	900x300x4mm   35 7/16x11 13/16x3/16" 900x150x4mm   35 7/16x5 7/8x3/16"	600x300x4mm   23 5/8x11 13/16x3/16" 600x300x6mm   23 5/8x11 13/16x ¹ /4"
23 5/8x11 13/16x3/16"	600x300x4mm   23 5/8x11 13/16x1/4"	900x150x4mm   35 7/16x5 7/8x3/16' 600x450x4mm   23 5/8x17 11/16x3/16' 600x300x4mm   23 5/8x11 13/16x3/16'	600x500x0mm   23 5/8x17 13/10x74 600x450x4mm   23 5/8x17 11/16x3/16"
		450x450x6mm   17 11/16x17 11/16x¼"	900x150x4mm   35 7/16x5 7/8x3/16"
	23 (c)		23 (e)
	23 (c)		
31	31 (d)		31 (f)
UV-cured Acrylic varnish	Water based PU varnish		
with ceramic beads	(2 varnish layers)	Water based PU varnish	Sanded Surface
Specification	r		
General Properties - EN 14085 + EN 12104 + EN 65		<0.0% - I	×0.0%
≤ 0,2% up to max. 1,0mm	≤ 0,2% up to max. 1,0mm	≤ 0,2% up to max. 1,0mm	≤ 0,2% up to max. 1,0mm
0; + 0,25	0 ;+ 0,25	0 ;+ 0,25	0; + 0,25
-	-	-	≤ 0,5
-	-	•	≤ 1,0
≤ 0,5 ≤ 1,0	≤ 0,5 ≤ 1,0	≤ 0,5 ≤ 1,0	≤ 0,5 ≤ 1,0
	-	-	
	•	-	-
	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·
	-	-	
	-	-	
-	•		•
≤ 0,4	- < 0,4	- ≤ 0,4	- < 0,4
≤ 0,4 ≤ 6	≤ 0,4 ≤ 6	≤ 0,4 ≤ 6	≤ 0,4 ≤ 6
3.5-4.5	3.5-4.5	-	3.5-4.5
-	-	-	-
nominal value (2000) ± 10%	4mm: nominal value 1800+ - 10% 6mm: nominal value 2700 + - 10%	4mm: nominal value 1800+ - 10% 6mm: nominal value 2700 + - 10%	-
≥ 95% of nominal value (450)	≥ 95% of nominal value (450)	≥ 95% of nominal value (450)	≥ 95% of nominal value (450)
Classification Properties - EN 14085 + EN 12104 + E	EN 655		
-	•	•	-
-	· · · · · · · · · · · · · · · · · · ·	•	•
≥ 4,0	> 4,0	> 4,0	-
≥ 450	≥ 450	≥ 450	-
-		No disturbance to the surface other than slight change in appearance and no delamination shall occur	
		No damage shall be visible after testing with a type 2	
-	-	foot	-
≤ 0,40 Safety properties - EN 14041	≤ 0,40	≤ 0,40	≤ 0,40
Safety properties - EN 14041 D _{fl-s1}	D _{fl-s1}	4mm: C _{fl-s1} / 6mm: D _{fl-s1}	C _{fl-sl}
DS	DS	DS	-
El	El	El	El
Not Antistatic	Not Antistatic	Not Antistatic	Not Antistatic
PCP Free Optional properties	PCP Free	PCP Free	PCP Free
Grade 0	·	Grade 0 (Acetone grau 3; Iodine grau 2)	
R≤ 0,150	R≤ 0,150	R≤ 0,150	R≤ 0,150
-	15	4mm: 13 /6mm: 14	12
	•	4mm: 15,3 / 6mm: 17,2 4mm: 65 / 6mm: 69	•
- 12±3°	-	4mm: 65 / 6mm: 69	
		· · · · · · · · · · · · · · · · · · ·	1
	•	-	
-		•	
		-	
-		•	
	· ·	· · · · · · · · · · · · · · · · · · ·	- -
•			
- - - - - - -	- - -	· · ·	• •

(a) The following products were tested: Disinfectant, Ethanol, Ammonia Solution, Citric acid, Iodine, Cleaning benzine. (b) Grade 0 = Unchanged; Grade 1 = Very little change; Grade 2 = Little change; Grade 3 = Change; Grade 4 = Strong change. (c) Must be varnished on-site with minimum 1-2 coats of W-2000 or another recommended varnish

(d) Must be varnished on-site with minimum 1-2 coats of W-2000 or another recommended varnish for this leve of use (see recommendation table in the packaging). (e) Must be varnished on-site with minimum 3 coats of W-2000 or another recommended varnish for this leve of use (see recommendation table in the packaging). (g) Slab with Corkcomfort Floating WRT, reduces in 3dB the step sound when compared with the reference slab.



Produced by Amorim, the worldwide market leader in cork products, Wicanders matches nature's most pure values with avant-garde technologies to provide high quality, ecologic and stylish flooring. Wicanders has an unsurpassed reputation for developing high standard and unique comfortable flooring solutions, following the latest decoration tendencies and targeting both residential and commercial market segments.

Wicanders is truly a sustainable brand!

www.wicanders.com



	Amorim Deutschland GmbH (+49) 4221 5 93-01 germany.ar.de@amorim.com	DE
	Amorim Benelux B.V. (+31) 166 604 111 info.ar.nl@amorim.com	BE NE LUX
	Amorim Deutschland GmbH (+43) 1 54 51 65 10austria.ar.de@amorim.com	AT
AMOR	Amorim Flooring Switzerland AG (+41) 41 726 20 20 info@amorim.ch	CH
HeadQuarters	Amorim Revestimentos, S.A. (+351) 227 475 600 geral.ar@amorim.com	PT
Amorim Reves	Amorim Revestimentos, S.A. (+34) 902 307 407 info.ar.es@amorim.com	ES
(+351) 227 475	Amorim Revestimentos, S.A. (+33) 800 914 848 info.ar.fr@amorim.com	FR
geral.ar@amor	Timberman Denmark A/S (+45) 995 252 52 timberman@timberman.dk	DK
121716-0	Dom Korkowy, Sp. z o.o. (+48) 126 379 639 krakow@domkorkowy.pl	PL
분석	Amorim Flooring North America (+1) 410 553 60 62 info.ar.us@amorim.com	US
	Amorim Flooring RUS (+7) 495 280 7860 info.ar.ru@amorim.com	RU



5 600 orim.com



CE



