



stone

Enabling wellbeing in every room



Beige Marble



Nature at your feet

Wicanders has a legacy that goes back to 1868 and is the global leading brand in flooring products with cork technology. Present in more than 70 countries, its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets, for all those wonderful and simple, yet sometimes unexpected moments. Floors for our lives.

Over the years, Wicanders has developed sustainable floor and wall coverings with exclusive properties due to its innovative Corktech technology. By combining state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment, that endures impacts and is very comfortable to walk and stand on.

Wicanders means wellbeing, a choice for life!





## FROM NATURE, TO YOUR SPECIAL SPACE.

Technology only makes sense if it improves people's lives. This concept finds expression in products developed with Corktech technology.

By using a unique engineered multilayer structure, which combines state of the art technology with the exclusive natural properties of cork, a higher standard in flooring is achieved, providing the perfect match between design and wellbeing.

Wicanders uniqueness is daily achieved by continuously research on how end customers think and live their spaces. Wicanders brings to the market products that provide a silent and thermally insulated environment, that endures through time and are sustainable at the same time.



**Silence**



**Natural  
Thermal Insulation**



**Walking Comfort**



**Impact  
Resistance**

**stone** Go 5

**stone** Essence 9

**stone** Resist<sup>+</sup> 13

**stone** hydracork 19

**GET THE BEST RESULTS WITH  
WICANDERS ACCESSORIES** 32

**CREATED BY HUMANS,  
INSPIRED BY NATURE** 33

**PRODUCT SELECTOR** 34

**WICANDERS' RANGE** 35

Sample images are cut from larger pieces. Decor and shade may vary slightly.

# stone


## Go

### Formats


905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"




RANGE	Go			
	Essence			
	Resist <sup>+</sup>			
	Hydrocork			


 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas

 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof



Aphanite Basalt

## Slate

# Serene and comforting like a hug.

The delicate nuances and gorgeous blend of neutral tones define the Slate look transforming any space into a serene and cosy ambiance.

For this look, we envision a design trend based on the fusion of a neutral colour palette, warm textures and natural woods for a contemporary and charming atmosphere.

This visual and texture delight creates an immediate sense of warmth and wellbeing in your home.



Cloudy Chalk Stone  
B0V6001

Cloudy Chalk Stone



## Beton



Aphanite Basalt  
BOV5002



# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



# Finishing & Warranty



Suitable for Heavy Traffic Residential areas and Moderate Traffic Commercial areas.



# stone

## Essence

### Formats

#### Beton

905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"

#### Travertine

605 x 445 x 10,5mm  
23 13/16 x 17 1/2 x 3/8"



RANGE	Go			
	Essence			
	Resist <sup>+</sup>			
	Hydrocork			



Heavy Traffic Residential areas



Moderate Traffic Commercial areas



Medium Traffic Commercial areas



Heavy Traffic Commercial areas




Budget products



Extra Cork



Waterproof

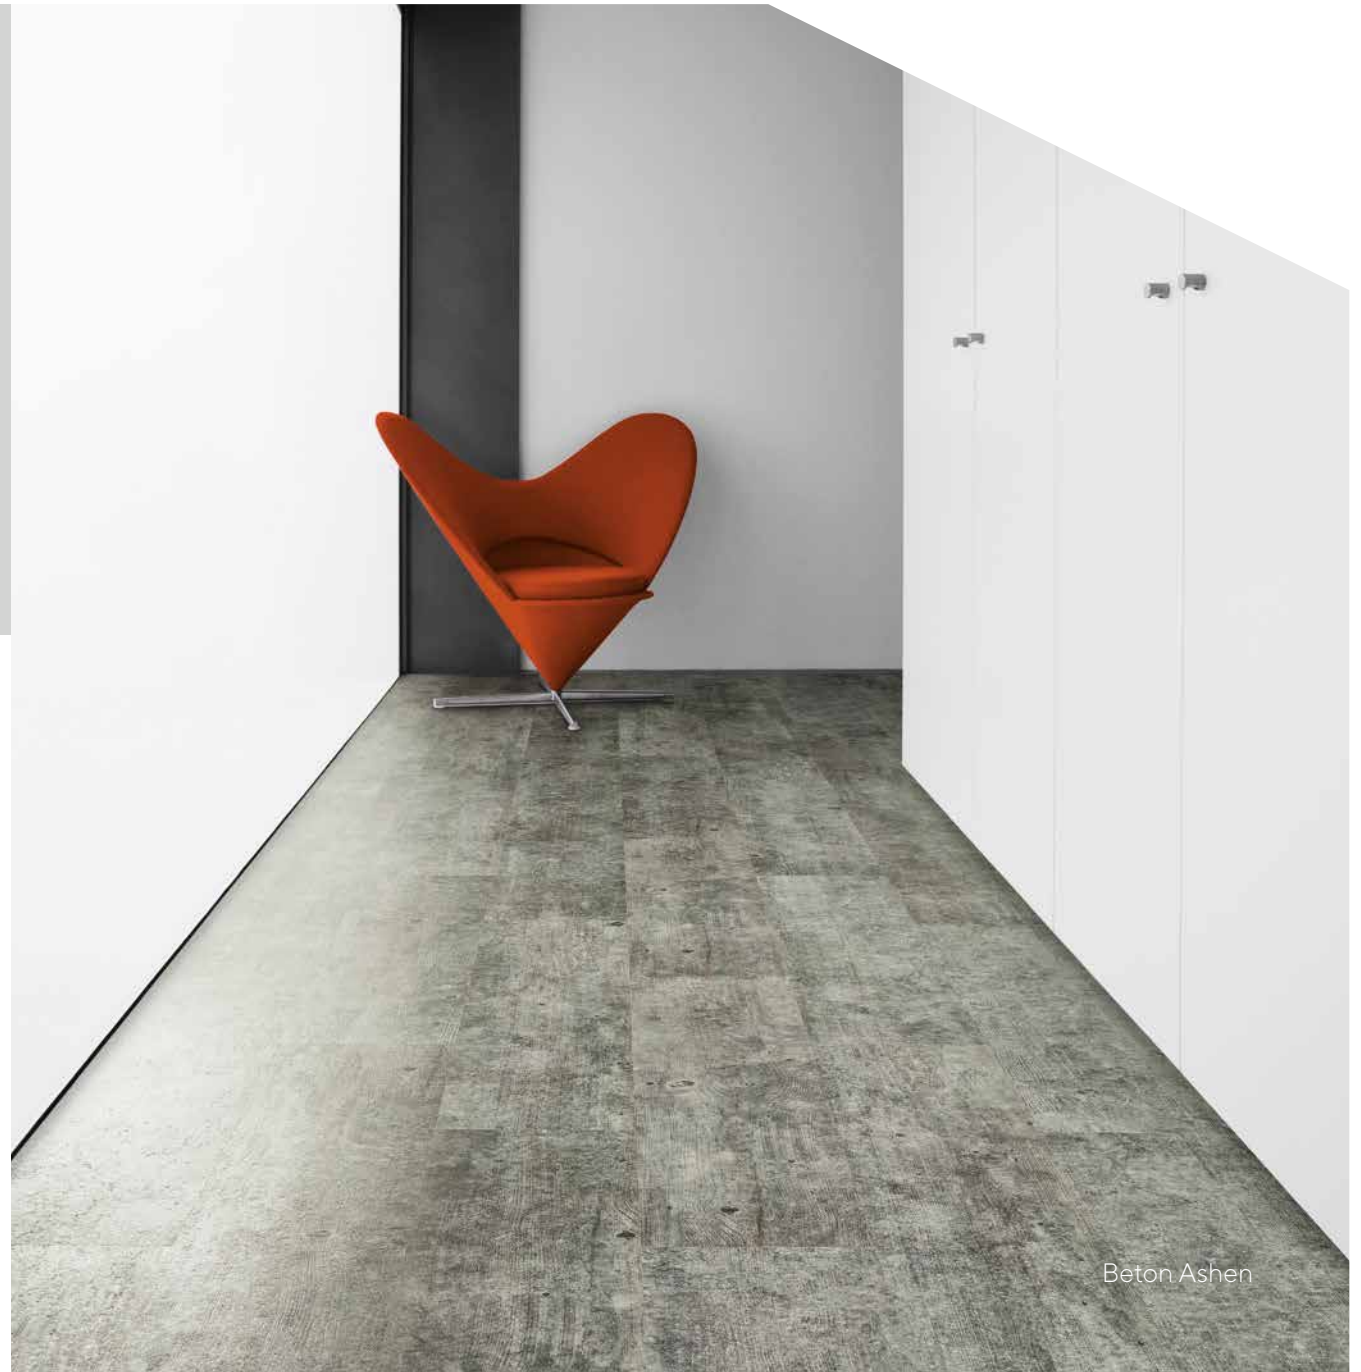

Beton Ashen

## Beton

Fill your home  
with comfort  
and charisma.


The decorative Beton has a bold and intense presence, creating comfortable spaces with an authentic personality.

This look matches contrasts between vibrant colours, soft textures and natural woods to create a strong statement.

Beton has the ability to transform a simple space into a charismatic and welcoming environment.



Beton Ashen  
D816003

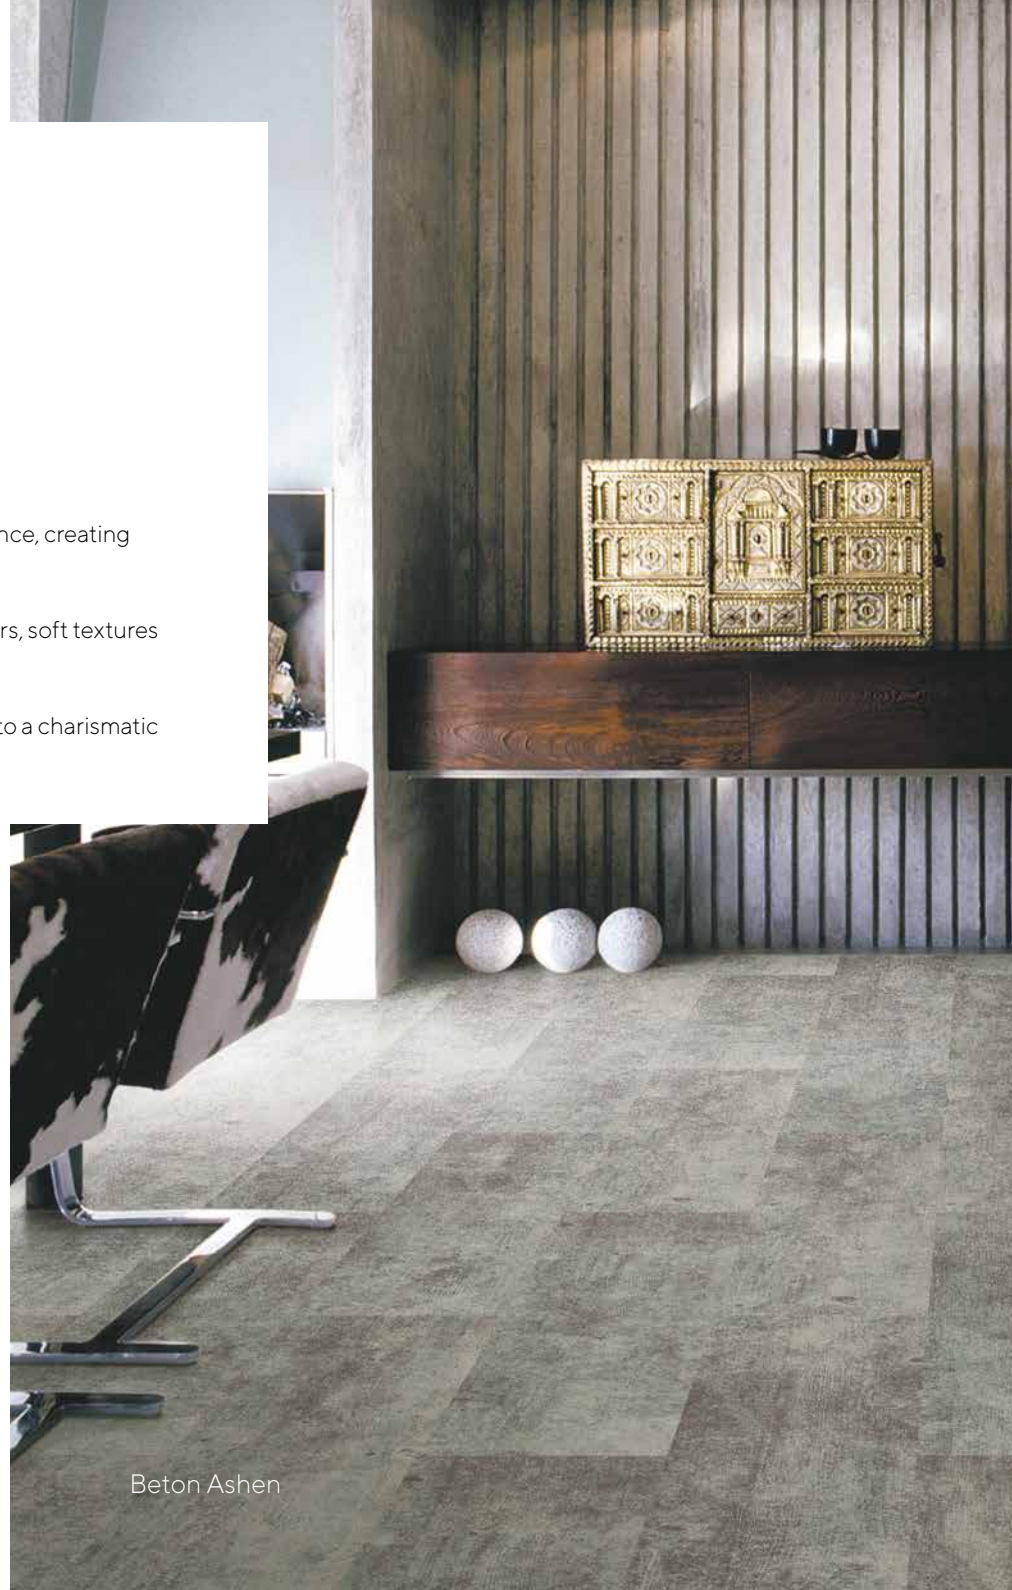

Beton Ashen



## Travertine

Feel serenity  
in every detail.


Travertine is a sophisticated decorative with beautiful shades of natural stone for a more stylish decor.

It merges on the flow of similar colours, smooth textures and accents of metallic glows to create an elegant decor.

The matching of decorative elements coordinated with the tones of this material creates a subtle and delicate environment.



Travertine Argent  
D818003

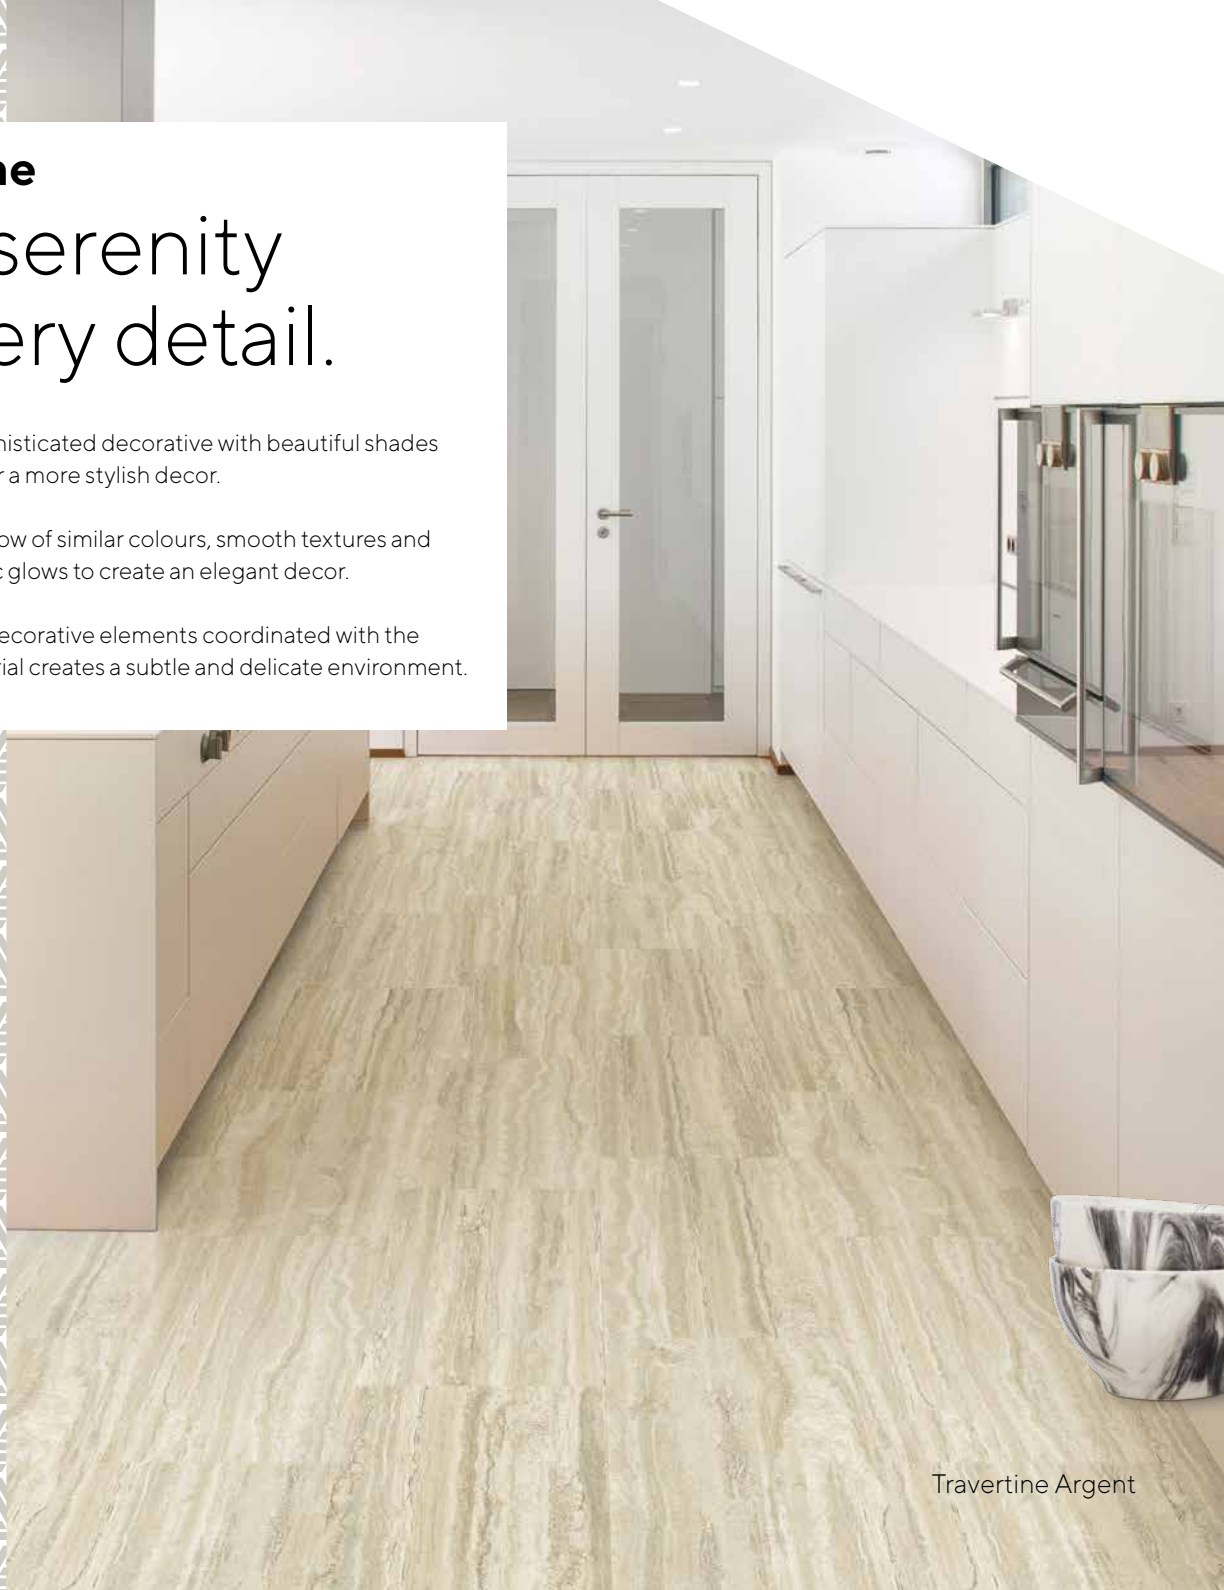

Travertine Argent



# Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK 3,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

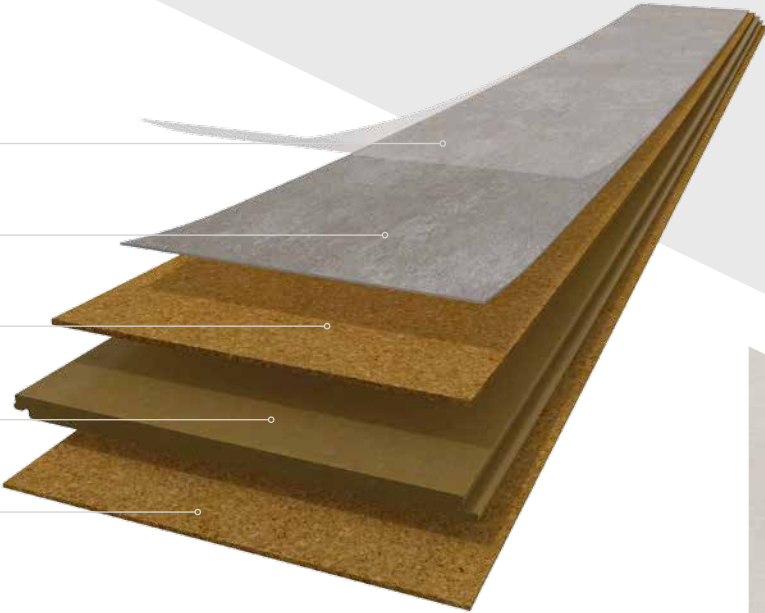

# Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). Due to its chemical reaction during the hot coating process it is extremely wear resistant and highly flexible. This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



# stone

## Resist<sup>+</sup>

### Formats

905 x 295 x 10,5mm  
35 5/8 x 11 5/8 x 3/8"



RANGE	Go			
	Essence			
	Resist <sup>+</sup>			
	Hydrocork			



Heavy Traffic Residential areas



Moderate Traffic Commercial areas



Medium Traffic Commercial areas



Heavy Traffic Commercial areas



Budget products



Extra Cork



Waterproof



Saurian Lime


## Limestone

Fresh, light and peaceful as life should be.

Light floors bright up and amplify spaces enhancing natural light into a room. Limestone is a calm and luminous visual and a great choice to make your space feel fresh and airy.

Have the best of this look by complementing it with cool and clean colours, soft textures and bright materials to create a light and refreshing atmosphere.

Ideal for both traditional and contemporary interiors  
Limestone is a timeless look.

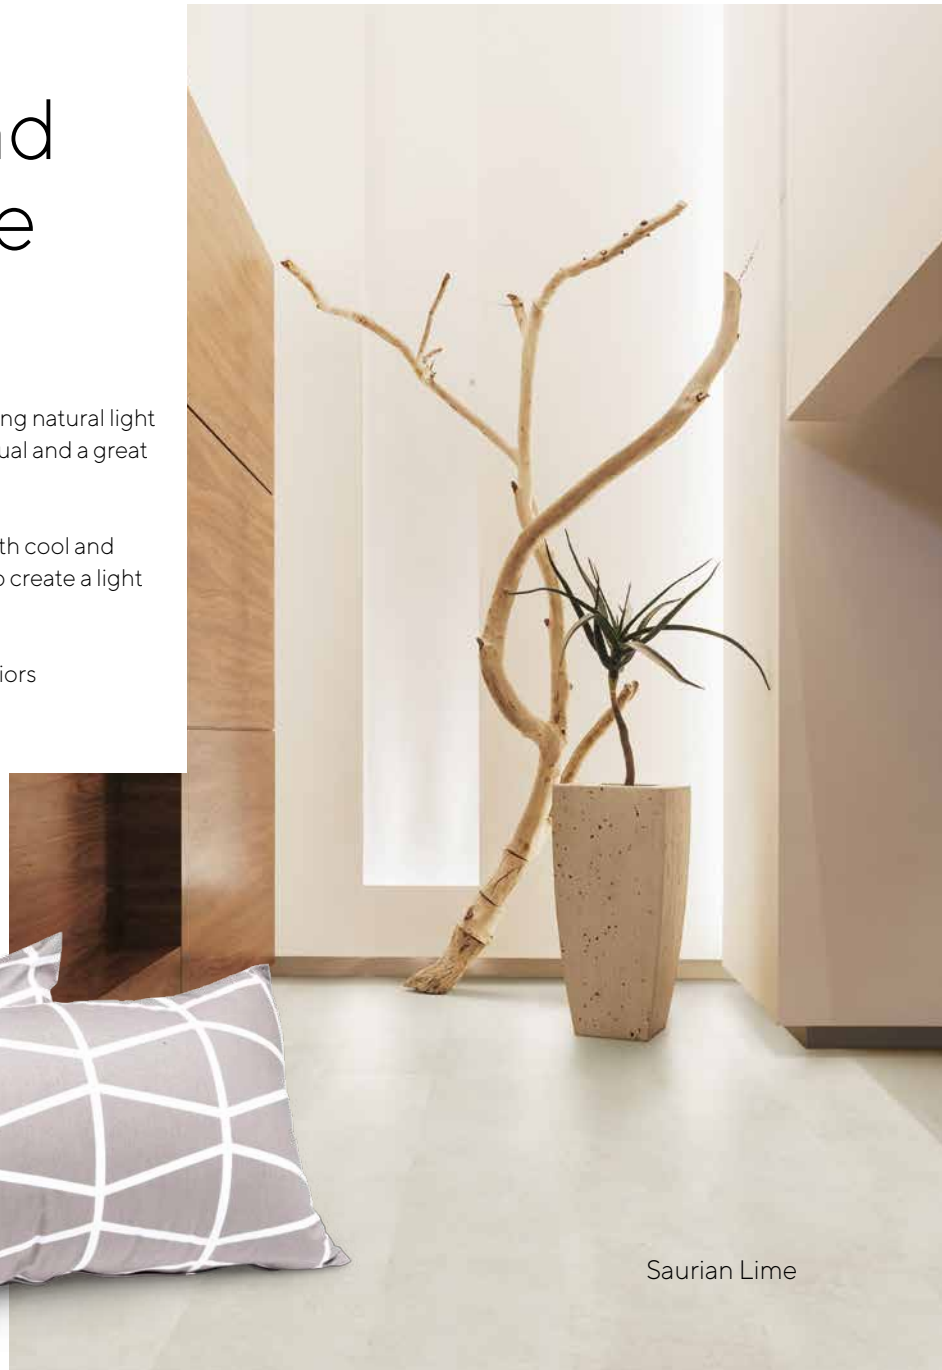

Saurian Lime



Saurian Lime  
E1XT001



Jurassic Limestone  
E1XS001

## Slate



Cliff Slate  
E1XQ001



Basque Slate  
E1XR001



Arabian Slate  
E1XP001




Arabian Slate



Black Marble  
E1XY001



Light Grey Marble  
E1XW001

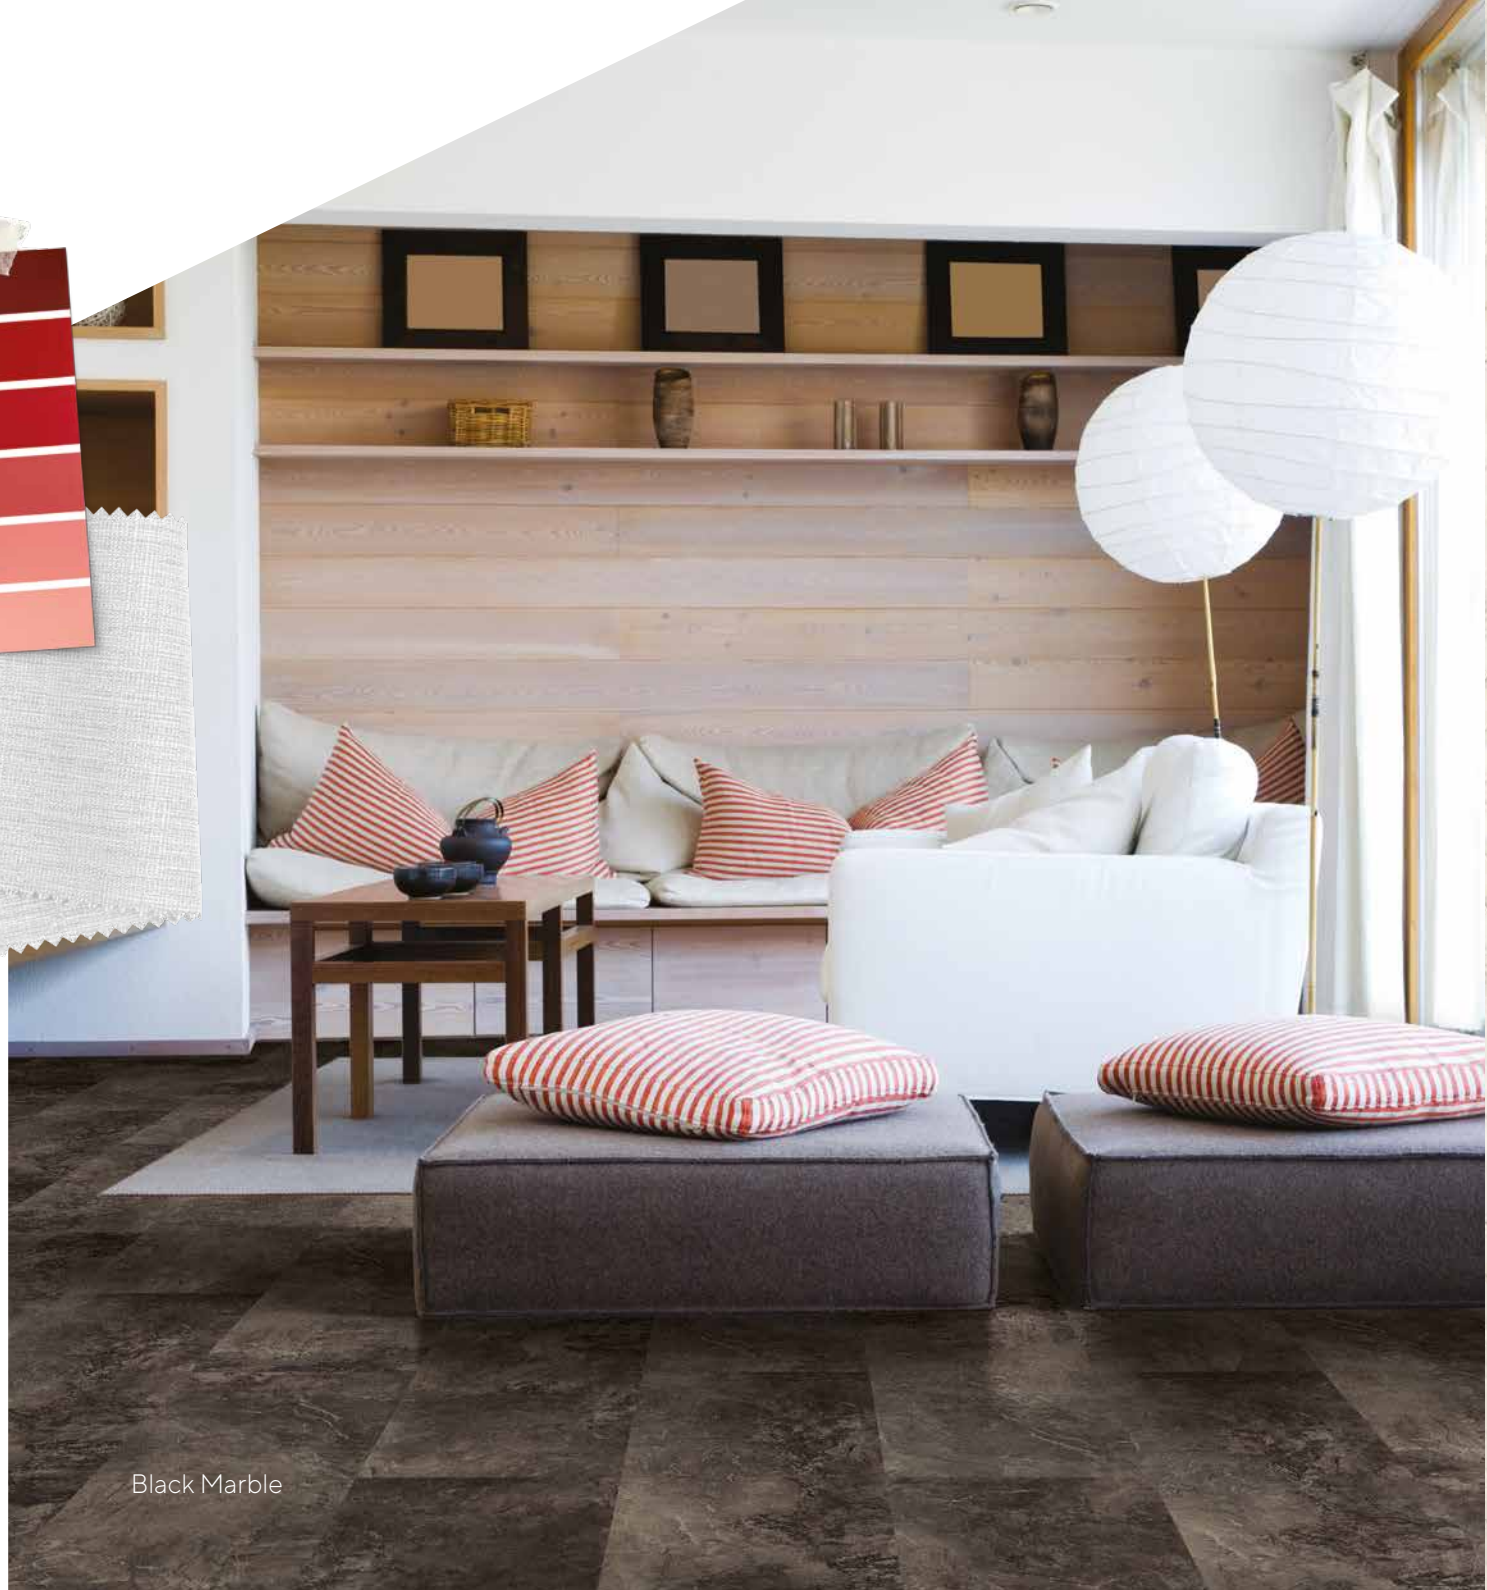

Black Marble

## Marble

Let the energy fill every space.

Veining floors add a sense of rhythm and Marble is a good example. This rich texture is the perfect choice for an energetic and dynamic atmosphere.

Warm and dark colors, bold patterns and heavy furniture for a more strong and vibrant space, are a good choice to enhance this marble look.

Marble adds flair and gives a stunning appearance for a more eye-catching interior.



Grey Marble



Beige Marble  
E1XV001



Grey Marble  
E1XU001



Graphite Marble  
E1XX001

# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

AGGLOMERATED CORK 2,7MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM



# Finishing & Warranty



HPS surface finish (High Performance Surface) has been specially developed for areas with heavy traffic, such as commercial, business or general public areas. This high performance surface has an extra hard wearing surface combined with Nano-Beads Technology, where extremely tiny beads are embedded in a top layer for improved properties such as scratch, slip, scuff and stain resistance.



# stone hydracork

## Formats

615 x 295 x 6mm  
24 7/32 x 11 5/8 x 1/4"



Floating

RANGE	Go			
	Essence			
	Resist <sup>+</sup>			
	Hydrocork			



Heavy Traffic Residential areas



Moderate Traffic Commercial areas



Medium Traffic Commercial areas



Heavy Traffic Commercial areas




Budget products



Extra Cork



Waterproof

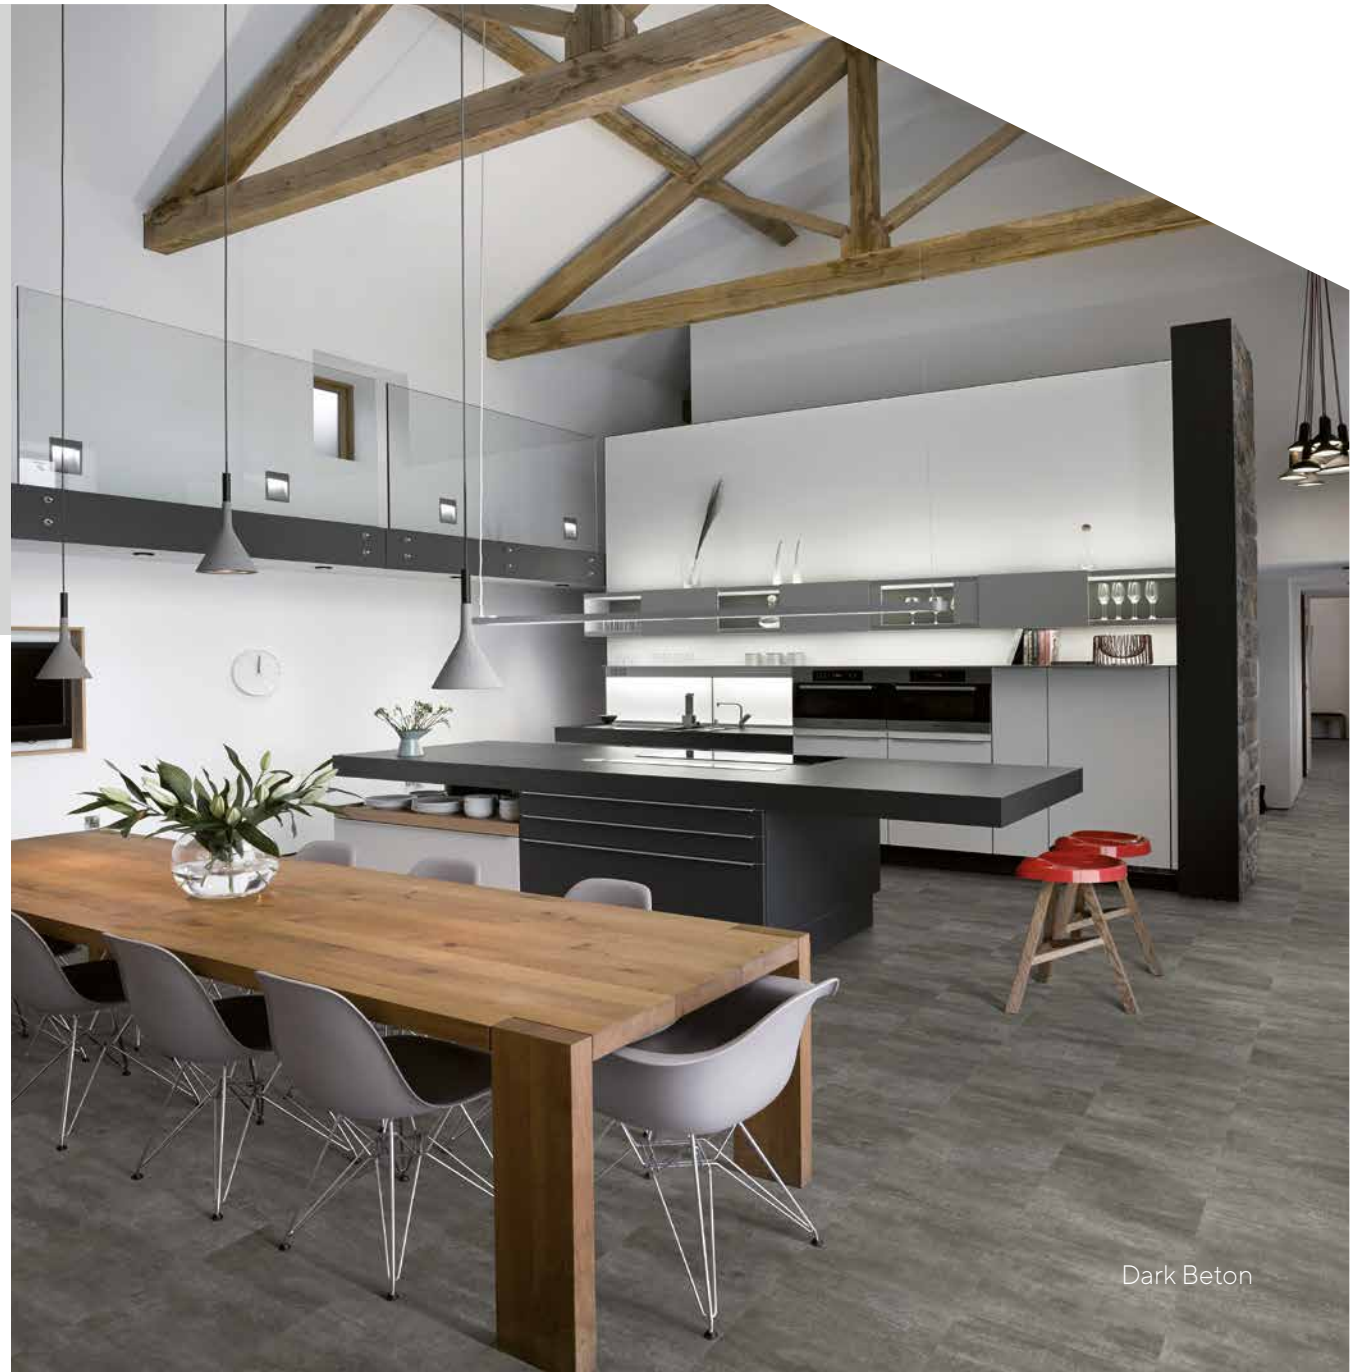

Dark Beton

**NO PROBLEM.**  
IT'S HYDROCORK.  
**hydracork** READY FOR REAL LIFE



**DURABLE,  
RESISTANT**  
AND EASY TO MAINTAIN





**100% WATERPROOF**

# EASY AND FAST INSTALLATION

## STABLE AND STRONG INSTALLATION WITH COMPRESSION SYSTEM

PressFit is a revolutionary compression system that takes full advantage of the amazing cork properties - flexibility, elasticity and compressibility - functioning like a cork stopper

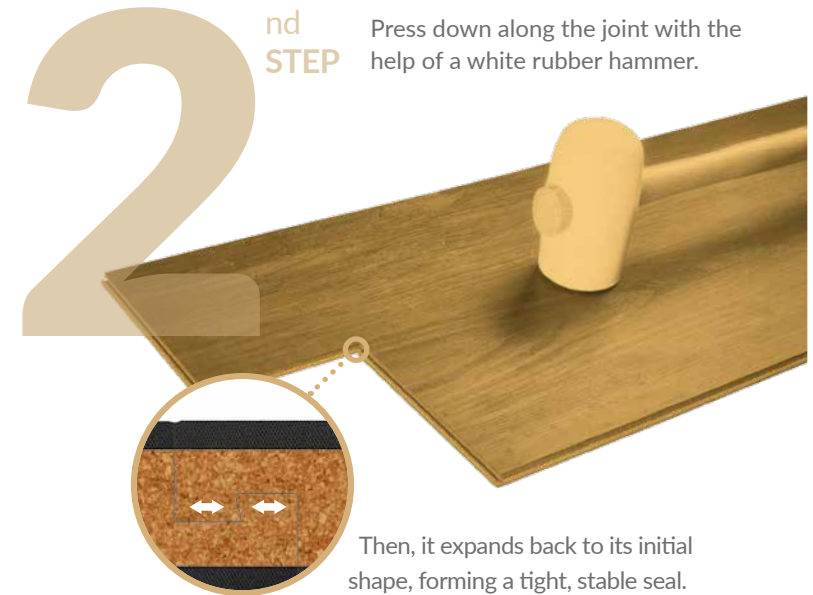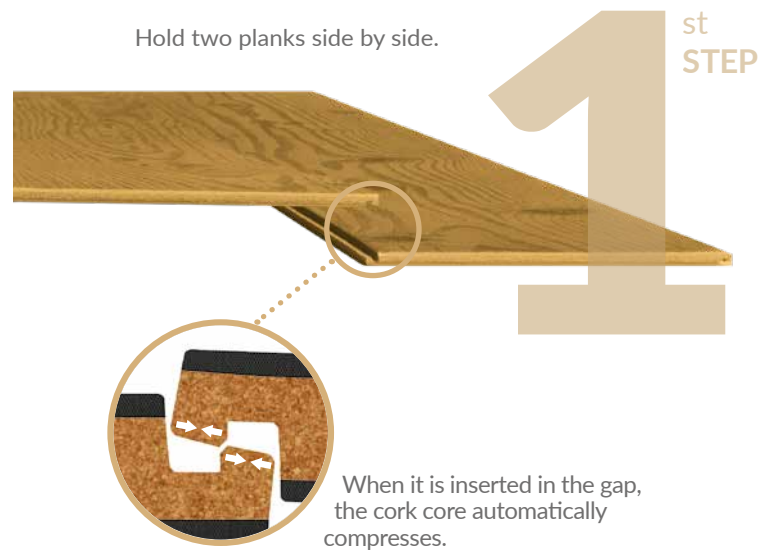

## REDUCED INSTALLATION COSTS

Hydrocork is only 6mm thick making it easy to cut. Avoids the need to remove the existing skirtings or to cut doors and it can be installed on top of other flooring materials.



\* Please see the terms and conditions of Wicanders Limited Warranty in the website.



Promotes global sustainability, environmental health, and safety.

## Beton



Dark Beton  
B5V5001



Dark Beton





Chalked Grey Stone

## Slate



## Chalked Grey Stone

B5V6001



## Limestone



Jurassic Limestone  
B5XS001



Jurassic Limestone



Graphite Marble

## Marble



Light Grey Marble  
B5XW001



Beige Marble  
B5XV001



Graphite Marble  
B5XX001



# Technical solution

PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK COMPOSITE CORE WITH PRESSFIT 3MM

BALANCING VINYL LAYER



# Finishing & Warranty



Suitable for Heavy Traffic Residential areas and Heavy Traffic Commercial areas.



\*Please see the terms and conditions of Wicanders Limited Warranty on the website.



Technical Data Sheet

	GO			ESSENCE			
	FLOATING						
			0,2mm Wear Layer 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8"			NPC 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 605 x 445 x 10,5mm   23 13/16 x 17 1/2 x 3/8"	
Level of use Domestic	ISO 10874	Class	23	ISO 10874	Class	23	
Level of use Commercial	ISO 10874	Class	31	ISO 10874	Class	32	
Surface Finishing	-	-	-			Polyurethane moisture-curing	
Wear Layer Binder Content	-	-	-	-	-	-	
	Standard-Test Method	Unit	Specification	Standard-Test Method	Unit	Specification	
General Properties							
Dimensions: Width Dimensions: Length	ISO 24342	mm	± 0,10 up to max. 0,5 mm max. 2,0 mm	ISO 24342	% mm	± 0,10 with max. 0,5 mm max. 2,0	
Nominal thickness for cork surfaces	-	-	-	-	-	-	
Overall thickness	ISO 24346	mm	± 0,25	ISO 24346	Average mm Individual values mm	Nominal ± 0,25 Maximum deviation from the average ± 0,30	
Squareness Straightness measured at the surface layer	ISO 24342	mm	≤ 0,50 ≤ 0,3	ISO 24342	mm	≤ 0,50 ≤ 0,30	
Apparent density Average Individual values	EN 672	Kg/m³	Nominal (930) ± 50	EN 672	Kg/m³	≥ 760 ≥ 95% nominal value	
Mass per unit area	ISO 23997	g/m²	Nominal +13% / -10%	ISO 23997	g/m²	8000 +/-10%	
Dimensional stability (humidity)	EN 669 (Annex C)	mm	≤ 5	EN 14085 Annex C / EN 669	%	≤ 5	
Dimensional stability (heat)	EN 14085 Annex C/ EN 669	%	-	-	-	-	
Openings between panels Average Individual values	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20	
Height difference between panels Average Individual values	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20	
Flatness of the panel Length: Concave / convex Width: Concave / convex	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15	EN 14085 Annex A	%	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15	
Residual indentation	ISO 24343-1	mm	≤ 0,15	-	-	-	
Colour fastness	ISO 105-BO2	Blue wool scale	≥ 6	-	-	-	
Thickness of top cork surface	-	-	-	ISO 24346	mm	≥ 3	
Peel resistance N/50 mm Average Individual values	-	-	-	ISO 24345 N/50	mm	0	
Wearing group	-	-	-	EN 660-1	Thickness loss (mm)	0	
Classification properties							
Wearing group	EN 660-1	Thickness loos ( lmm)	-	-	-	-	
Overall thickness	ISO 24346	mm	-	-	-	-	
Thickness of wear layer	ISO 24340	mm	0,2	-	-	-	
Castor chair	EN 425	Visual effect - after 25 000 cycles	No disturbance to the surfacen other than slight change in appearance and no delamination shall occur	EN 425	Visual effect after 25 000 cycles	No disturbance to the surface other than slight change in appearance and no delaminating shall occur	
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type 2 foot	EN 424	Visual effect	No damage shall be visible when tested with foot type 2	
Thickness swelling floor panel	-	-	-	ISO 24336	%	≤ 18	
Thermal resistance	-	-	-	-	-	-	
Residual indentation	-	-	-	ISO 24343-1	mm	≤ 0,3	
Safety properties - EN 14041							
Fire resistance	EN 13501-1	Class	Bfl s1	EN13501-1	Class	Cfl s1	
Slip classification	EN 13893	Class	DS	EN 13893	Class	DS	

	RESIST+			HYDROCORK		
	FLOATING					
			0,55mm Wear layer   HPS 905 x 295 x 10,5mm   35 5/8x11 5/8x3/8"			0,5mm wear layer 615 x 295 x 6mm   247/32x11 5/8x1/4"
	ISO 10874	Class	23	ISO 10874	Class	23
	ISO 10874	Class	33	ISO 10874	Class	33
	-	-	HPS 0,55 mm wear layer	-	-	-
	ISO 10582	-	TYPE I	-	-	-
	Standard-Test Method	Unit	Specification	Standard-Test Method	Unit	Specification

	-	-	-	ISO 24342	mm	± 0,10% up to max. 0,5mm max. 2,0mm
	ISO 24342	mm	2,7	-	-	-
	-	-	-	ISO 24346	mm	nominal ± 0,25
	ISO 24342	mm	≤ 0,20 ≤ 0,30	ISO 24342	mm	≤ 0,50 ≤ 0,30
	-	-	-	-	-	-
	ISO 23997	g/m²	Nominal value (9210) - 10 % + 13%	ISO 23997	g/m2	Nominal +13% / -10%
	EN14085 (Annex C)	%	≤ 0,25	EN 14085 Annex C/ EN 669	mm	≤ 5
	-	-	-	ISO 23999	%	≤ 0,25
	EN 14085 (Annex B)	mm	≤ 0,15 ≤ 0,20	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20
	EN 14085 (Annex B)	mm	≤ 0,15 ≤ 0,20	EN 14085 Annex B	mm	≤ 0,15 ≤ 0,20
	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0 ≤ 0,10 / ≤ 0,15
	ISO 24343-1	mm	≤ 0,10	ISO 24343-1	mm	≤ 0,1
	ISO 105-BO2 Method	Blue wool scale	≥ 6	ISO 105-BO2	Blue wool scale	≥ 6
	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-

	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	ISO 24340	mm	0,55
	ISO 4918	Visual effect	No disturbance to the surface other than slight change in appearance and no delamination shall occur	EN 425	Visual effect - after 25.000 cycles	No disturbance to the surface other than a slight change in appearance and no delamination shall occur
	ISO 16581	Visual effect	No damage shall be visible when tested with foot type O	EN 424	Visual effect	No damage shall be visible after testing with a type O foot
	ISO 24336	%	≤ 15	ISO 24336	%	≤ 15
	EN 12667	(m²k)/W	≤ 0,11	-	-	-
	-	-	-	-	-	-

	EN 13501-1	Class	Bfl s1	ISO 11925-2/ISO 9239-1 (classification according to EN 13501-1)	Class	Bfl-s1
	EN 13893	Class	DS	EN 13893	Class	DS

# Technical Data Sheet

	GO			ESSENCE			
	FLOATING						
			0,2mm Wear Layer 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8"			NPC 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8" 605 x 445 x 10,5mm   23 13/16 x 17 1/2 x 3/8"	
Formaldehyde emission	DIN EN 717-1	Class	E1	DIN EN 717-1	Class	E1	
Electrical behaviour	EN 1815	kV	Antistatic	EN 1815	KV	Not Antistatic	
Content pentachlorophenol (PCP)	CEN/TR 14823 (ihd-W 409) EN 14041 Annex B	mg/Kg %	- Undetectable	CEN/TR 14823 (ihd-W 409)	mg/Kg	PCP Free	
Additional properties							
Stains resistance	ISO 26987 (a)	Grade	Grade 0 (b)	zEN 438 (e) ISO 26987 (a)	Grade	- Grade 0 = unchanged (c)	
Thermal resistance	EN 12667	(m²K)/W	R < 0,15	EN 12667	(m²K)/W	R≤ 0.15 (m²K)/W (d)	
Impact sound reduction	ISO 140-8	dB (Δ Lw)	16	ISO 140-8	dB (Δ Lw)	18	
Walking noise	IHD - W431	dB (A)	Reduction improvement 11,4 dB (A) Difference of loudness 45,4%	IHD - w431	dB (A)	Reduction improvement 12dB Difference of loudness 47,5%	
Light fastness	-	-	-	ISO 105-B02 EN 15187	Blue wool scale	- > 6	
Abrasion resistance	-	-	-	EN 14354 Annex D EN 13329 EN 14354	Revolutions Wt Class	- AC6 WR3	
Reflected walking noise Improved measure Difference of loudness [Sone] relative difference	-	-	-	-	-	-	
Swelling of the joints (moisture exposure)	-	-	-	-	-	-	
Airborne sound transmission loss	-	-	-	-	-	-	
Impact sound transmission	-	-	-	-	-	-	
Smoke density	-	-	-	-	-	-	
Radiant panel (critical radiant flux)	-	-	-	-	-	-	
Thermal resistance	-	-	-	-	-	-	
Residual indentation	-	-	-	-	-	-	
Static load limit	-	-	-	-	-	-	
Ignition characteristics of finished Textile floor covering systems	-	-	-	-	-	-	

(a) The following products were tested: disinfectant, C2H5OH, NH4OH, citric acid, iodine, petroleum, spirit.

(b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong Change. \* Except Iodine - Grade 2 - Little change.

(c) Grade 0 - Unchanged / Grade 1 - Very little change. With ethanol we got grade 1 after 2 hours.

(d) Suitable for floor heating systems, according to German Federal Association Radiant Panel Heating.

(e) The following products were tested: acetone, coffee, NaOH, H2O2 at 3%, black shoe cream

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on [www.wicanders.com](http://www.wicanders.com)



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



- AgBB (DIBt)
- Emission class A+ according to the French regulation on VOC
- Belgian VOC regulation on emissions from construction products
- LEED v4 (outside North America; LEED v4 for BUILDING DESIGN AND CONSTRUCTION, April 5, 2016)
- BREEAM International New Construction 2016 (Technical Manual SD233 1.0), Exemplary Level
- Finnish M1 classification for construction products (Finland)
- RAL UZ 120 (not for PVC flooring), February 2011 (Germany)
- Austrian Eco Label, Guideline UZ 56, floor coverings, version 3.0, January 1, 2015 (The requirements for odor are not included)



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.

	RESIST+			HYDROCORK		
	FLOATING					
			0,55mm Wear layer   HPS 905 x 295 x 10,5mm   35 5/8 x 11 5/8 x 3/8"			0,5mm wear layer 615 x 295 x 6mm   24 7/32 x 11 5/8 x 1/4"
	EN 717-1	Class	E1	DIN EN 717-1	Class	E1
	-	-	-	-	-	-
	EN 14041 (Annex B)	%	PCP Free	EN 14041 (Annex B)	%	Undetectable
	-	-	-	ISO 26987 (a)	Grade	Grade 0 (b)
	-	-	-	EN 12667	(m2K)/W	0,05
	EN ISO 10140-3:2010	dB (Δ Lw)	17	ISO 140-8	dB (Δ Lw)	16 dB
	-	-	-	IHD -W431	dB (a)	Reduction improvement 11,1dB Difference of Loudness 51,1%
	-	-	-	-	-	-
	-	-	-	-	-	-
	IHD - W - 431	dB %	9,5 49	-	-	-
	-	-	-	IHD 423	mm	No visible effect
	-	-	-	ASTM E90 /ASTM E413	STC (dB)	62 dB
	-	-	-	ASTM E492 /ASTM E989 ASTM E2179	IIC (dB) Δ IIC	61 dB 16 dB
	-	-	-	ASTM662	KW/m2	Flaming & Non Flaming ≤ 450
	-	-	-	ASTM E648	(W/cm2)	≥ 0,45 W/cm2 Exceeds, Class I
	-	-	-	ASTM C177	R-value (m2K)/W	0,0432
	-	-	-	ASTM F1914	%	0,40%
	-	-	-	ASTM F970	in or mm	≤ 0,005 in (load of 250 lb) ≤ 0,127 mm (load of 113.4 Kg)
	-	-	-	ASTM D2859	-	Meets the criteria



ESSENCE | RESIST+ | HYDROCORK

An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



ESSENCE

The Blue Angel is a voluntary certification that guarantees that a product or service meets high standards when it comes to its environmental, health and performance characteristics. In the process, these products and services are always evaluated across their entire life cycle.



HYDROCORK

Global GreenTagCert™ is an independent certification and rating scheme for green products, recognized by the Green Building Councils of Australia and New Zealand. This certification also allows the products to be listed in the Ecospecifier Global eco-products.

# Get the best results with Wicanders accessories



## Underlays

### Increased comfort and insulation

To reinforce the already amazing insulation properties of cork flooring, Wicanders provides Acousticork, a cork underlay which lets you turn your home into an even cosier space.

Acousticork reduces the walking sound and heat dispersion. Overall, it makes rooms cosier and more peaceful, which is essential in making any house feel like home.

- High durability and long term resilience
- Increases floor thermal insulation
- Natural and sustainable product
- Easy to handle and install

## Skirtings

### The perfect match to make a pleasant interior

In order to help create a more classy and harmonious interior, Wicanders provides skirting profiles to complement your floor. Create your ideal transition between the walls and the floor, whether by an exact match or contrasting colours.

Contact your supplier for information on the available skirting references.



## Maintenance

### Optimal care for an everlasting beauty

To keep your floor spotless, Wicanders has available a set of auxiliary products. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible.

### Regular Maintenance

#### Wicanders Soft Cleaner

This mild detergent is appropriate for weekly or even daily cleaning. It can be used to remove dirt, stopping it from infiltrating in the joints and in the regular embossing of the product.

#### Wicanders Spray Cleaner

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.





## CREATED BY HUMANS, INSPIRED BY NATURE

Wicanders represents an unique balance between the creation of innovative products and the protection of the environment, combining state-of-the-art technology with the amazing natural properties of cork.



**A green production process** – Cork waste resulting from the industrial process is 100% reincorporated into the production, creating an ecologically virtuous cycle.



**Intensive use of biomass** – The cork powder resulting from the industrial process is burned in order to create biomass which is then used as a major source of energy to supply the production facilities, allowing Wicanders also to base its production in a sustainable source of energy.



**Low carbon emission** – Cork's natural property of retaining CO<sub>2</sub> combined with an eco-sustainable industrial process allows Wicanders to develop eco-efficient products with a low carbon emissions factor, positively contributing to a sustainable environment.



**Indoor Air Quality** – Refined to be free of harmful phthalates Wicanders products have been awarded with worldwide indoor air quality certifications such as Greenguard Gold or A+.



**Negative Global Warming Potential** – The majority of Wicanders products contribute to reduce global warming, since they retain more CO<sub>2</sub> than they emit.

## CORK - A SUSTAINABLE RAW MATERIAL

Cork comes from the bark of the Cork Oak, a slowly growing tree from the Mediterranean basin that may live for 200 years and plays a central role in the social and economic development of this region.



**Truly environmental-friendly** – The extraction of cork and its related industries are remarkably sustainable, since the tree is never cut or damaged during the extraction process and the bark regenerates after each harvest.



**Positive ecological impact** – It is estimated that the Portuguese cork oak forest – Montado – is responsible for retaining 5% of the country's annual CO<sub>2</sub> emission, representing 4.8 million tons per year.



**An activity that crosses generations** – Cork Oaks are manually harvested for the first time when the tree is 25 years old and then every 9 years making it an activity that passes from generation to generation.



**A positive economic and social impact** – Cork harvesting is a regular and cyclical process that contributes to environmental, economic and social sustainability of the rural areas in the Mediterranean region.





































**Rural areas economic engine** – The cork activity as well as related activities fueled by this industry create jobs in many rural areas of the country, encouraging people to settle there.

# Product Selector


RANGE	Go	Essence		Resist <sup>+</sup>	hydracork
FINISHING	0,2mm Wear Layer	NPC		0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential   31 Commercial	23 Residential   32 Commercial		23 Residential   33 Commercial	
BEVEL	No Bevel			4 Side Micro Bevel	
DIMENSION (mm   inches)	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	605 x 445 x 10.5 23 13/16 x 17 1/2 x 3/8"	905 x 295 x 10.5 35 5/8 x 11 5/8 x 3/8"	615 x 295 x 6 24 7/32 x 11 5/8 x 1/4"
Aphanite Basalt	BOV5002				
Arabian Slate				E1XP001	
Basque Slate				E1XR001	
Beige Marble				E1XV001	B5XV001
Beton Ashen		D816003			
Black Marble				E1XY001	
Chalked Grey Stone					B5V6001
Cliff Slate				E1XQ001	
Cloudy Chalk Stone	BOV6001				
Dark Beton					B5V5001
Graphite Marble				E1XX001	B5XX001
Grey Marble				E1XU001	
Jurassic Limestone				E1XS001	B5XS001
Light Grey Marble				E1XW001	B5XW001
Saurian Lime				E1XT001	
Travertine Argent			D818003		


# Wicanders' range


LOOKS				
	cork	wood	stone	
RANGE	Go	 	  	  
	Essence	 	 	 
	Resist	—	 	—
	Resist <sup>+</sup>	 	  	  
	Hydrocork	—	  	  
	Pure	  	—	—
	Parquet	—	 Engineered wood	—

 Heavy Traffic Residential areas

 Moderate Traffic Commercial areas


 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Glue down

 Extra Cork

 Waterproof



# WICANDERS®

Nature at your feet



AMORIM

#### HeadQuarters

Amorim Revestimentos S.A

(+351) 227 475 600

geral.ar@amorim.com

[www.wicanders.com](http://www.wicanders.com)

DE	Amorim Deutschland GmbH (+49) 4221 5 93-01 .....	germany.ar.de@amorim.com
BE NE LUX	Amorim Benelux B.V. (+31) 166 604 111 .....	info.ar.nl@amorim.com
AT	Amorim Deutschland GmbH (+43) 1 54 51 65 10 .....	austria.ar.de@amorim.com
CH	Amorim Flooring Switzerland AG (+41) 41 726 20 20 .....	info@amorim.ch
PT	Amorim Revestimentos, S.A. (+351) 227 475 600 .....	geral.ar@amorim.com
ES	Amorim Revestimentos, S.A. (+34) 902 307 407 .....	info.ar.es@amorim.com
FR	Amorim Revestimentos, S.A. (+33) 800 914 848 .....	info.ar.fr@amorim.com
DK	Timberman Denmark A/S (+45) 995 252 52 .....	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o. (+48) 126 379 639 .....	krakow@domkorkowy.pl
US	Amorim Flooring North America (+1) 410 553 60 62 .....	info.ar.us@amorim.com
RU	Amorim Flooring Rus, OOO (+7) 495 280 7860 .....	info.ar.ru@amorim.com
SW	Amorim Flooring Sweden +46 (0)31107740 .....	order.se@wicanders.com

COMPETE  
2020

PORTUGAL  
2020

UNIÃO EUROPEIA  
Fundo Europeu  
de Desenvolvimento Regional

CE